

TABLE OF CONTENTS

LIST OF TABLES	19-iii
LIST OF FIGURES	19-iv
19. BUILDING CHARACTERISTICS	19-1
19.1. INTRODUCTION	19-1
19.2. RECOMMENDATIONS	19-2
19.3. RESIDENTIAL BUILDING CHARACTERISTICS STUDIES	19-9
19.3.1. Key Study of Volumes of Residences	19-9
19.3.1.1. U.S. DOE (2008a)—Residential Energy Consumption Survey (RECS).....	19-9
19.3.2. Relevant Studies of Volumes of Residences	19-9
19.3.2.1. Versar (1990)—Database on Perfluorocarbon Tracer (PFT) Ventilation Measurements.....	19-9
19.3.2.2. Murray (1997)—Analysis of RECS and PFT Databases	19-9
19.3.2.3. U.S. Census Bureau (2009)—American Housing Survey for the United States: 2009	19-10
19.3.3. Other Factors	19-10
19.3.3.1. Surface Area and Room Volumes	19-10
19.3.3.2. Products and Materials	19-10
19.3.3.3. Loading Ratios	19-11
19.3.3.4. Mechanical System Configurations	19-11
19.3.3.5. Type of Foundation	19-12
19.3.3.5.1. Lucas et al. (1992)—National Residential Radon Survey	19-12
19.3.3.5.2. U.S. DOE (2008a)—Residential Energy Consumption Survey (RECS).....	19-13
19.4. NON-RESIDENTIAL BUILDING CHARACTERISTICS STUDIES	19-13
19.4.1. U.S. DOE (2008b)—Non-Residential Building Characteristics—Commercial Buildings Energy Consumption Survey (CBECS)	19-13
19.5. TRANSPORT RATE STUDIES	19-14
19.5.1. Air Exchange Rates	19-14
19.5.1.1. Key Study of Residential Air Exchange Rates	19-15
19.5.1.1.1. Koontz and Rector (1995)—Estimation of Distributions for Residential Air Exchange Rates.....	19-15
19.5.1.2. Relevant Studies of Residential Air Exchange Rates	19-15
19.5.1.2.1. Nazaroff et al. (1988)—Radon Entry via Potable Water	19-15
19.5.1.2.2. Versar (1990)—Database of PFT Ventilation Measurements.....	19-15
19.5.1.2.3. Murray and Burmaster (1995)—Residential Air Exchange Rates in the United States: Empirical and Estimated Parametric Distributions by Season and Climatic Region.....	19-16
19.5.1.2.4. Diamond et al. (1996)—Ventilation and Infiltration in High-Rise Apartment Buildings	19-16
19.5.1.2.5. Graham et al. (2004)—Contribution of Vehicle Emissions From an Attached Garage to Residential Indoor Air Pollution Levels.....	19-16
19.5.1.2.6. Price et al. (2006)—Indoor-Outdoor Air Leakage of Apartments and Commercial Buildings	19-16

TABLE OF CONTENTS (continued)

19.5.1.2.7.	Yamamoto et al. (2010)—Residential Air Exchange Rates in Three U.S. Metropolitan Areas: Results From the Relationship Among Indoor, Outdoor, and Personal Air Study 1999–2001	19-17
19.5.1.3.	Key Study of Non-Residential Air Exchange Rates.....	19-17
19.5.1.3.1.	Turk et al. (1987)—Commercial Building Ventilation Rates and Particle Concentrations	19-17
19.5.2.	Indoor Air Models	19-17
19.5.3.	Infiltration Models.....	19-18
19.5.4.	Vapor Intrusion	19-19
19.5.5.	Deposition and Filtration.....	19-19
19.5.5.1.	Deposition.....	19-19
19.5.5.1.1.	Thatcher and Layton (1995)—Deposition, Resuspension, and Penetration of Particles Within a Residence	19-19
19.5.5.1.2.	Wallace (1996)—Indoor Particles: A Review.....	19-20
19.5.5.1.3.	Thatcher et al. (2002)—Effects of Room Furnishings and Air Speed on Particle Deposition Rates Indoors.....	19-20
19.5.5.1.4.	He et al. (2005)—Particle Deposition Rates in Residential Houses	19-20
19.5.5.2.	Filtration	19-20
19.5.6.	Interzonal Airflows.....	19-20
19.5.7.	House Dust and Soil Loadings	19-20
19.5.7.1.	Roberts et al. (1991)—Development and Field Testing of a High-Volume Sampler for Pesticides and Toxics in Dust.....	19-21
19.5.7.2.	Thatcher and Layton (1995)—Deposition, Resuspension, and Penetration of Particles Within a Residence	19-21
19.6.	CHARACTERIZING INDOOR SOURCES	19-21
19.6.1.	Source Descriptions for Airborne Contaminants	19-22
19.6.2.	Source Descriptions for Waterborne Contaminants.....	19-23
19.6.3.	Soil and House Dust Sources.....	19-24
19.7.	ADVANCED CONCEPTS	19-24
19.7.1.	Uniform Mixing Assumption.....	19-24
19.7.2.	Reversible Sinks	19-24
19.8.	REFERENCES FOR CHAPTER 19.....	19-25

LIST OF TABLES

Table 19-1.	Summary of Recommended Values for Residential Building Parameters	19-3
Table 19-2.	Confidence in Residential Volume Recommendations	19-4
Table 19-3.	Summary of Recommended Values for Non-Residential Building Parameters	19-5
Table 19-4.	Confidence in Non-Residential Volume Recommendations	19-6
Table 19-5.	Confidence in Air Exchange Rate Recommendations for Residential and Non-Residential Buildings	19-7
Table 19-6.	Average Estimated Volumes of U.S. Residences, by Housing Type and Ownership	19-30
Table 19-7.	Residential Volumes in Relation to Year of Construction	19-30
Table 19-8.	Summary of Residential Volume Distributions Based on U.S. DOE (2008a).....	19-31
Table 19-9.	Summary of Residential Volume Distributions Based on Versar (1990).....	19-31
Table 19-10.	Number of Residential Single Detached and Mobile Homes by Volume.....	19-32
Table 19-11.	Dimensional Quantities for Residential Rooms	19-32
Table 19-12.	Examples of Products and Materials Associated With Floor and Wall Surfaces in Residences.....	19-33
Table 19-13.	Residential Heating Characteristics by U.S. Census Region	19-34
Table 19-14.	Residential Heating Characteristics by Urban/Rural Location.....	19-35
Table 19-15.	Residential Air Conditioning Characteristics by U.S. Census Region.....	19-36
Table 19-16.	Percent of Residences With Basement, by Census Region and U.S. EPA Region	19-36
Table 19-17.	Percent of Residences With Basement, by Census Region	19-37
Table 19-18.	States Associated With U.S. EPA Regions and Census Regions	19-38
Table 19-19.	Percent of Residences With Certain Foundation Types by Census Region.....	19-39
Table 19-20.	Average Estimated Volumes of U.S. Commercial Buildings, by Primary Activity.....	19-40
Table 19-21.	Non-Residential Buildings: Hours per Week Open and Number of Employees	19-41
Table 19-22.	Non-Residential Heating Energy Sources for Non-Mall Buildings	19-42
Table 19-23.	Non-Residential Air Conditioning Energy Sources for Non-Mall Buildings	19-44
Table 19-24.	Summary Statistics for Residential Air Exchange Rates (in ACH), by Region	19-45
Table 19-25.	Summary of Major Projects Providing Air Exchange Measurements in the PFT Database	19-46
Table 19-26.	Distributions of Residential Air Exchange Rates (in ACH) by Climate Region and Season	19-47
Table 19-27.	Air Exchange Rates in Commercial Buildings by Building Type	19-47
Table 19-28.	Statistics of Estimated Normalized Leakage Distribution Weighted for All Dwellings in the United States	19-48
Table 19-29.	Particle Deposition During Normal Activities	19-48
Table 19-30.	Deposition Rates for Indoor Particles	19-48
Table 19-31.	Measured Deposition Loss Rate Coefficients	19-49
Table 19-32.	Total Dust Loading for Carpeted Areas.....	19-49
Table 19-33.	Particle Deposition and Resuspension During Normal Activities.....	19-50
Table 19-34.	Dust Mass Loading After 1 Week Without Vacuum Cleaning	19-50
Table 19-35.	Simplified Source Descriptions for Airborne Contaminants	19-51

LIST OF FIGURES

Figure 19-1. Elements of Residential Exposure. 19-52
Figure 19-2. Configuration for Residential Forced-Air Systems. 19-52
Figure 19-3. Idealized Patterns of Particle Deposition Indoors. 19-53
Figure 19-4. Air Flows for Multiple-Zone Systems. 19-54

19. BUILDING CHARACTERISTICS

19.1. INTRODUCTION

Unlike previous chapters in this handbook, which focus on human behavior or characteristics that affect exposure, this chapter focuses on building characteristics. Assessment of exposure in indoor settings requires information on the availability of the chemical(s) of concern at the point of exposure, characteristics of the structure and microenvironment that affect exposure, and human presence within the building. The purpose of this chapter is to provide data that are available on building characteristics that affect exposure in an indoor environment. This chapter addresses residential and non-residential building characteristics (volumes, surface areas, mechanical systems, and types of foundations), transport phenomena that affect chemical transport within a building (airflow, chemical-specific deposition and filtration, and soil tracking), and information on various types of indoor building-related sources associated with airborne exposure and soil/house dust sources. Source-receptor relationships in indoor exposure scenarios can be complex due to interactions among sources, and transport/transformation processes that result from chemical-specific and building-specific factors.

There are many factors that affect indoor air exposures. Indoor air models generally require data on several parameters. This chapter provides recommendations on two parameters, volume and air exchange rates. Other factors that affect indoor air quality are furnishings, siting, weather, ventilation and infiltration, environmental control systems, material durability, operation and maintenance, occupants and their activities, and building structure. Available relevant information on some of these other factors is provided in this chapter, but specific recommendations are not provided, as site-specific parameters are preferred.

Figure 19-1 illustrates the complex factors that must be considered when conducting exposure assessments in an indoor setting. In addition to sources within the building, chemicals of concern may enter the indoor environment from outdoor air, soil, gas, water supply, tracked-in soil, and industrial work clothes worn by the residents. Indoor concentrations are affected by loss mechanisms, also illustrated in Figure 19-1, involving chemical reactions, deposition to and re-emission from surfaces, and transport out of the building. Particle-bound chemicals can enter indoor air through resuspension. Indoor air concentrations of gas-phase organic chemicals are affected by the presence of

reversible sinks formed by a wide range of indoor materials. In addition, the activity of human receptors greatly affects their exposure as they move from room to room, entering and leaving the exposure scene.

Inhalation exposure assessments in indoor settings are modeled by considering the building as an assemblage of one or more well-mixed zones. A zone is defined as one room, a group of interconnected rooms, or an entire building. At this macroscopic level, well-mixed assumptions form the basis for interpretation of measurement data as well as simulation of hypothetical scenarios. Exposure assessment models on a macroscopic level incorporate important physical factors and processes. These well-mixed, macroscopic models have been used to perform indoor air quality simulations (Axley, 1989), as well as indoor air exposure assessments (Ryan, 1991; Mckone, 1989). Nazaroff and Cass (1986) and Wilkes et al. (1992) have used computer programs featuring finite difference or finite element numerical techniques to model mass balance. A simplified approach using desktop spreadsheet programs has been used by U.S. Environmental Protection Agency (EPA) (1990b). EPA has created two useful indoor air quality models: the (I-BEAM) (<http://www.epa.gov/iaq/largebldgs/i-beam/index.html>), which estimates indoor air quality in commercial buildings and the *Multi-Chamber Concentration and Exposure Model* (MCCEM) (<http://www.epa.gov/opptintr/exposure/pubs/mccem.htm>), which estimates average and peak indoor air concentrations of chemicals released from residences.

Major air transport pathways for airborne substances in buildings include the following:

- Air exchange—Air leakage through windows, doorways, intakes and exhausts, and “adventitious openings” (i.e., cracks and seams) that combine to form the leakage configuration of the building envelope plus natural and mechanical ventilation;
- Interzonal airflows—Transport through doorways, ductwork, and service chaseways that interconnect rooms or zones within a building; and
- Local circulation—Convective and advective air circulation and mixing within a room or within a zone.

The air exchange rate is generally expressed in terms of air changes per hour (ACH), with units of

(hour⁻¹). It is defined as the ratio of the airflow (m³ hour⁻¹) to the volume (m³). The distribution of airflows across the building envelope that contributes to air exchange and the interzonal airflows along interior flowpaths is determined by the interior pressure distribution. The forces causing the airflows are temperature differences, the actions of wind, and mechanical ventilation systems. Basic concepts on distributions and airflows have been reviewed by the American Society of Heating Refrigerating & Air Conditioning Engineers (ASHRAE, 2009). Indoor-outdoor and room-to-room temperature differences create density differences that help determine basic patterns of air motion. During the heating season, warmer indoor air tends to rise to exit the building at upper levels by stack action. Exiting air is replaced at lower levels by an influx of colder outdoor air. During the cooling season, this pattern is reversed: stack forces during the cooling season are generally not as strong as in the heating season because the indoor-outdoor temperature differences are not as pronounced.

The position of the neutral pressure level (i.e., the point where indoor-outdoor pressures are equal) depends on the leakage configuration of the building envelope. The stack effect arising from indoor-outdoor temperature differences is also influenced by the partitioning of the building interior. When there is free communication between floors or stories, the building behaves as a single volume affected by a generally rising current during the heating season and a generally falling current during the cooling season. When vertical communication is restricted, each level essentially becomes an independent zone. As the wind flows past a building, regions of positive and negative pressure (relative to indoors) are created within the building; positive pressures induce an influx of air, whereas negative pressures induce an outflow. Wind effects and stack effects combine to determine a net inflow or outflow.

The final element of indoor transport involves the actions of mechanical ventilation systems that circulate indoor air through the use of fans. Mechanical ventilation systems may be connected to heating/cooling systems that, depending on the type of building, recirculate thermally treated indoor air or a mixture of fresh air and recirculated air. Mechanical systems also may be solely dedicated to exhausting air from a designated area, as with some kitchen range hoods and bath exhausts, or to recirculating air in designated areas as with a room fan. Local air circulation also is influenced by the movement of people and the operation of local heat sources.

19.2. RECOMMENDATIONS

Table 19-1 presents the recommendations for residential building volumes and air exchange rates. Table 19-2 presents the confidence ratings for the recommended residential building volumes. The U.S. EPA 2010 analysis of the 2005 Residential Energy Consumption Survey (RECS) data indicates a 492 m³ average living space (DOE, 2008a). However, these values vary depending on the type of housing (see Section 19.3.1.1). The recommended lower end of housing volume is 154 m³. Other percentiles are available in Section 19.3.1.1. Residential air exchange rates vary by region of the country. The recommended median air exchange rate for all regions combined is 0.45 ACH. The arithmetic mean is not preferred because it is influenced fairly heavily by extreme values at the upper tail of the distribution. This value was derived by Koontz and Rector (1995) using the perfluorocarbon tracer (PFT) database. Section 19.5.1.1.1 presents distributions for the various regions of the country. For a conservative value, the 10th percentile for the PFT database (0.18 ACH) is recommended (see Section 19.5.1.1.1).

Table 19-3 presents the recommended values for non-residential building volumes and air exchange rates. Volumes of non-residential buildings vary with type of building (e.g., office space, malls). They range from 1,889 m³ for food services to 287,978 m³ for enclosed malls. The mean for all buildings combined is 5,575 m³. These data come from the Commercial Buildings Energy Consumption Survey (CBECS) (DOE, 2008b). The last CBECS for which data are publicly available was conducted in 2003. Table 19-4 presents the confidence ratings for the non-residential building volume recommendations. The mean air exchange rate for all non-residential buildings combined is 1.5 ACH. The 10th percentile air exchange rate for all buildings combined is 0.60 ACH. These data come from Turk et al. (1987).

Table 19-5 presents the confidence ratings for the air exchange rate recommendations for both residential and non-residential buildings. Air exchange rate data presented in the studies are extremely limited. Therefore, the recommended values have been assigned a "low" overall confidence rating, and these values should be used with caution.

Volume and air exchange rates can be used by exposure assessors in modeling indoor-air concentrations as one of the inputs to exposure estimation. Other inputs to the modeling effort include rates of indoor pollutant generation and losses to (and, in some cases, re-emissions from) indoor sinks. Other things being equal (i.e., holding constant the pollutant generation rate and effect of

Chapter 19—Building Characteristics

indoor sinks), lower values for either the indoor volume or the air exchange rate will result in higher indoor-air concentrations. Thus, values near the lower end of the distribution (e.g., 10th percentile) for either parameter are appropriate in developing conservative estimates of exposure.

There are some uncertainties in, or limitations on, the distribution for volumes and air exchange rates that are presented in this chapter. For example, the RECS contains information on floor area rather than total volume. The PFT database did not base its measurements on a sample that was statistically representative of the national housing stock. PFT has been found to underpredict seasonal average air exchange by 20 to 30% Sherman (1989). Using PFT

to determine air exchange can produce significant errors when conditions during the measurements greatly deviate from idealizations calling for constant, well-mixed conditions. Principal concerns focus on the effects of naturally varying air exchange and the effects of temperature in the permeation source. Some researchers have found that failing to use a time-weighted average temperature can greatly affect air exchange rate estimates (Leaderer et al., 1985). A final difficulty in estimating air exchange rates for any particular zone results from interconnectedness of multi-zone models and the effect of neighboring zones as demonstrated by Sinden (1978) and Sandberg (1984).

Table 19-1. Summary of Recommended Values for Residential Building Parameters

	Mean	10 th Percentile	Source
Volume of Residence ^a	492 m ³ (central estimate) ^b	154 m ³ (lower percentile) ^c	U.S. EPA 2010 analysis of U.S. DOE (2008a)
Air Exchange Rate	0.45 ACH (central estimate) ^d	0.18 ACH (lower percentile) ^e	Koontz and Rector (1995)
^a	Volumes vary with type of housing. For specific housing type volumes, see Table 19-6.		
^b	Mean value presented in Table 19-6 recommended for use as a central estimate for all single family homes, including mobile homes and multifamily units.		
^c	10 th percentile value from Table 19-8 recommended to be used as a lower percentile estimate.		
^d	Median value recommended to be used as a central estimate based across all U.S. census regions (see Table 19-24).		
^e	10 th percentile value across all U.S. census regions recommended to be used as a lower percentile value (see Table 19-24).		
ACH	= Air changes per hour.		

Table 19-2. Confidence in Residential Volume Recommendations		
General Assessment Factors	Rationale	Rating
Soundness		Medium
<i>Adequacy of Approach</i>	The study was based on primary data. Volumes were estimated assuming an 8-foot ceiling height. The effect of this assumption has been tested by Murray (1997) and found to be insignificant.	
<i>Minimal (or defined) Bias</i>	Selection of residences was random.	
Applicability and Utility		Medium
<i>Exposure Factor of Interest</i>	The focus of the studies was on estimating house volume as well as other factors.	
<i>Representativeness</i>	Residences in the United States were the focus of the study. The sample size was fairly large and representative of the entire United States. Samples were selected at random.	
<i>Currency</i>	The most recent RECS survey was conducted in 2005.	
<i>Data Collection Period</i>	Data were collected in 2005.	
Clarity and Completeness		High
<i>Accessibility</i>	The RECS database is publicly available.	
<i>Reproducibility</i>	Direct measurements were made.	
<i>Quality Assurance</i>	Not applicable.	
Variability and Uncertainty		Medium
<i>Variability in Population</i>	Distributions are presented by housing type and regions, but some subcategory sample sizes were small.	
<i>Uncertainty</i>	Although residence volumes were estimated using the assumption of 8-foot ceiling height, Murray (1997) found this assumption to have minimal impact.	
Evaluation and Review		Medium
<i>Peer Review</i>	The RECS database is publicly available. Some data analysis was conducted by U.S. EPA.	
<i>Number and Agreement of Studies</i>	Only one study was used to derive recommendations. Other relevant studies provide supporting evidence.	
Overall Rating	.	Medium

Table 19-3. Summary of Recommended Values for Non-Residential Building Parameters			
	Mean ^a	10 th Percentile ^b	Source
Volume of Building (m ³) ^c			
Vacant	4,789	408	
Office	5,036	510	
Laboratory	24,681	2,039	
Non-refrigerated warehouse	9,298	1,019	
Food sales	1,889	476	
Public order and safety	5,253	816	
Outpatient healthcare	3,537	680	
Refrigerated warehouse	19,716	1,133	
Religious worship	3,443	612	
Public assembly	4,839	595	U.S. EPA analysis of U.S. DOE (2008b)
Education	8,694	527	
Food service	1,889	442	
Inpatient healthcare	82,034	17,330	
Nursing	15,522	1,546	
Lodging	11,559	527	
Strip shopping mall	7,891	1,359	
Enclosed mall	287,978	35,679	
Retail other than mall	3,310	510	
Service	2,213	459	
Other	5,236	425	
All Buildings ^d	5,575	527	
Air Exchange Rate ^e	Mean (SD)1.5 (0.87) ACH Range 0.3–4.1 ACH	0.60 ACH	Turk et al. (1987)
^a	Mean values are recommended as central estimates for non-residential buildings (see Table 19-20).		
^b	10th percentile values are recommended as lower estimates for non-residential buildings (see Table 19-20).		
^c	Volumes were calculated assuming a ceiling height of 20 feet for warehouses and enclosed malls and 12 feet for other structures (see Table 19-20).		
^d	Weighted average assuming a ceiling height of 20 feet for warehouses and enclosed malls and 12 feet for other structures (see Table 19-20).		
^e	Air exchange rates for commercial buildings (see Table 19-27).		
SD	= Standard deviation.		
ACH	= Air changes per hour.		

Table 19-4. Confidence in Non-Residential Volume Recommendations		
General Assessment Factors	Rationale	Rating
Soundness		Medium
<i>Adequacy of Approach</i>	All non-residential data were based on one study: CBECS (DOE, 2008b). Volumes were estimated assuming a 20-foot ceiling height assumption for warehouses and a 12-foot height assumption for all other non-residential buildings based on scant anecdotal information. Although Murray (1997) found that the impact of an 8-foot ceiling assumption was insignificant for residential structures, the impact of these ceiling height assumptions for non-residential buildings is unknown.	
<i>Minimal (or defined) Bias</i>	Selection of residences was random for CBECS.	
Applicability and Utility		High
<i>Exposure Factor of Interest</i>	CBECS (DOE, 2008b) contained ample building size data, which were used as the basis provided for volume estimates.	
<i>Representativeness</i>	CBECS (DOE, 2008b) was a nationwide study that generated weighted nationwide data based upon a large random sample.	
<i>Currency, Data Collection Period</i>	The data were collected in 2003.	
Clarity and Completeness		High
<i>Accessibility</i>	The data are available online in both summary tables and raw data. http://www.eia.doe.gov/emeu/cbecs/contents.html	
<i>Reproducibility</i>	Direct measurements were made.	
<i>Quality Assurance</i>	Not applicable.	
Variability and Uncertainty		Medium
<i>Variability in Population</i>	Distributions are presented by building type, heating and cooling system type, and employment, but a few subcategory sample sizes were small.	
<i>Uncertainty</i>	Volumes were calculated using speculative assumptions for building height. The impact of such assumptions may or may not be significant.	
Evaluation and Review		Low
<i>Peer Review</i>	There are no studies from the peer-reviewed literature.	
<i>Number and Agreement of Studies</i>	All data are based upon one study: CBECS (DOE, 2008b).	
Overall Rating	.	Medium

Chapter 19—Building Characteristics

Table 19-5. Confidence in Air Exchange Rate Recommendations for Residential and Non-Residential Buildings		
General Assessment Factors	Rationale	Rating
Soundness		Low
<i>Adequacy of Approach</i>	The studies were based on primary data; however, most approaches contained major limitations, such as assuming uniform mixing, and residences were typically not selected at random.	
<i>Minimal (or defined) Bias</i>	Bias may result because the selection of residences and buildings was not random. The commercial building study (Turk et al., 1987) was conducted only on buildings in the northwest United States.	
Applicability and Utility		Low
<i>Exposure Factor of Interest</i>	The focus of the studies was on estimating air exchange rates as well as other factors.	
<i>Representativeness</i>	Study residences were typically in the United States, but only RECS (DOE, 2008a) selected residences randomly. PFT residences were not representative of the United States. Distributions are presented by housing type and regions; although some of the sample sizes for the subcategories were small. The commercial building study (Turk et al., 1987) was conducted only on buildings in the northwest United States.	
<i>Currency</i>	Measurements in the PFT database were taken between 1982–1987. The Turk et al. (1987) study was conducted in the mid-1980s.	
<i>Data Collection Period</i>	Only short-term data were collected; some residences were measured during different seasons; however, long-term air exchange rates are not well characterized. Individual commercial buildings were measured during one season.	
Clarity and Completeness		Medium
<i>Accessibility</i>	Papers are widely available from government reports and peer-reviewed journals.	
<i>Reproducibility</i>	Precision across repeat analyses has been documented to be acceptable.	
<i>Quality Assurance</i>	Not applicable.	
Variability and Uncertainty		Medium
<i>Variability in Population</i>	For the residential estimates, distributions are presented by U.S. regions, seasons, and climatic regions, but some of the sample sizes for the subcategories were small. The commercial estimate comes from buildings in the northwest U.S. representing two climate zones, and measurements were taken in three seasons (spring, summer, and winter).	
<i>Uncertainty</i>	Some measurement error may exist. Additionally, PFT has been found to underpredict seasonal average air exchange by 20–30% (Sherman, 1989). Turk et al. (1987) estimates a 10–20% measurement error for the technique used to measure ventilation in commercial buildings.	

Table 19-5. Confidence in Air Exchange Rate Recommendations for Residential and Non-Residential Buildings (continued)

General Assessment Factors	Rationale	Rating
Evaluation and Review		Low
<i>Peer Review</i>	The studies appear in peer-reviewed literature.	
<i>Number and Agreement of Studies</i>	Three residential studies are based on the same PFT database. The database contains results of 20 projects of varying scope. The commercial building rate is based on one study.	
Overall Rating		Low

Chapter 19—Building Characteristics

**19.3. RESIDENTIAL BUILDING
CHARACTERISTICS STUDIES****19.3.1. Key Study of Volumes of Residences****19.3.1.1. U.S. DOE (2008a)—Residential Energy
Consumption Survey (RECS)**

Measurement surveys have not been conducted to directly characterize the range and distribution of volumes for a random sample of U.S. residences. Related data, however, are regularly collected through the U.S. Department of Energy's (DOE) RECS. In addition to collecting information on energy use, this triennial survey collects data on housing characteristics including direct measurements of total and heated floor space for buildings visited by survey specialists. For the most recent survey done in 2005, a multistage probability sample of 4,381 residences was surveyed, representing 111 million housing units nationwide. The 2005 survey response rate was 77.1%. Volumes were estimated from the RECS measurements by multiplying the heated floor space area by an assumed ceiling height of 8 feet. The data and data tables were released to the public in 2008.

In 2010, the U.S. EPA conducted an analysis of the RECS 2005 survey data. Table 19-6 and Table 19-7 present results for residential volume distributions by type of residence, ownership, and year of construction from the 2005 RECS. Table 19-6 provides information on average estimated residential volumes according to housing type and ownership. The predominant housing type—single-family detached homes—also had the largest average volume. Multifamily units and mobile homes had volumes averaging about half that of single-family detached homes, with single-family attached homes about halfway between these extremes. Within each category of housing type, owner-occupied residences averaged about 50% greater volume than rental units. Data on the relationship of residential volume to year of construction are provided in Table 19-7 and indicate a slight decrease in residential volumes between 1950 and 1979, followed by an increasing trend. A ceiling height of 8 feet was assumed in estimating the average volumes, whereas there may have been some time-related trends in ceiling height. Table 19-8 presents distributions of residential volumes for all house types and all units. The average house volume for all types of units for all years was estimated to be 492 m³.

It is important to note that in 2005, the RECS changed the way it calculated total square footage. The total average square footage per housing unit for the 2001 RECS was reported as 1,975 ft². This figure

excluded unheated garages, and for most housing units, living space in attics. The average total square footage for housing units in the 2005 RECS was 2,171 ft² (i.e., 492 m³ converted to ft³ and assuming an 8-foot ceiling; see Table 19-7), which includes attic living space for all housing units. The only available figures that permit comparison of total square footage for both survey years would exclude all garage floorspace and attic floorspace in all housing units—for 2001, the average total square footage was 2,005, and for 2005, the average total was 2,029 ft².

The advantages of this study were that the sample size was large, and it was representative of houses in the United States. Also, it included various housing types. A limitation of this analysis is that volumes were estimated assuming a ceiling height of 8 feet. Volumes of individual rooms in the house cannot be estimated.

**19.3.2. Relevant Studies of Volumes of
Residences****19.3.2.1. Versar (1990)—Database on
Perfluorocarbon Tracer (PFT)
Ventilation Measurements**

Versar (1990) compiled a database of time-averaged air exchange and interzonal airflow measurements in more than 4,000 residences. These data were collected between 1982 and 1987. The residences that appear in this database are not a random sample of U.S. homes. However, they represent a compilation of homes visited in about 100 different field studies, some of which involved random sampling. In each study, the house volumes were directly measured or estimated. The collective homes visited in these field projects are not geographically balanced. A large fraction of these homes are located in southern California. Statistical weighting techniques were applied in developing estimates of nationwide distributions to compensate for the geographic imbalance. The Versar (1990) PFT database found a mean value of 369 m³ (see Table 19-9).

The advantage of this study is that it provides a distribution of house volumes. However, more up-to-date data are available from RECS 2005 (DOE, 2008a).

**19.3.2.2. Murray (1997)—Analysis of RECS and
PFT Databases**

Using a database from the 1993 RECS and an assumed ceiling height of 8 feet, Murray (1997) estimated a mean residential volume of 382 m³ using

Chapter 19—Building Characteristics

RECS estimates of heated floor space. This estimate is slightly different from the mean of 369 m³ given in Table 19-9. Murray's (1997) sensitivity analysis indicated that when a fixed ceiling height of 8 feet was replaced with a randomly varying height with a mean of 8 feet, there was little effect on the standard deviation of the estimated distribution. From a separate analysis of the PFT database, based on 1,751 individual household measurements, Murray (1997) estimated an average volume of 369 m³, the same as previously given in Table 19-9. In performing this analysis, the author carefully reviewed the PFT database in an effort to use each residence only once, for those residences thought to have multiple PFT measurements.

Murray (1997) analyzed the distribution of selected residential zones (i.e., a series of connected rooms) using the PFT database. The author analyzed the "kitchen zone" and the "bedroom zone" for houses in the Los Angeles area that were labeled in this manner by field researchers, and "basement," "first floor," and "second floor" zones for houses outside of Los Angeles for which the researchers labeled individual floors as zones. The kitchen zone contained the kitchen in addition to any of the following associated spaces: utility room, dining room, living room, and family room. The bedroom zone contained all the bedrooms plus any bathrooms and hallways associated with the bedrooms. The following summary statistics (mean \pm standard deviation) were reported by Murray (1997) for the volumes of the zones described above: 199 \pm 115 m³ for the kitchen zone, 128 \pm 67 m³ for the bedroom zone, 205 \pm 64 m³ for the basement, 233 \pm 72 m³ for the first floor, and 233 \pm 111 m³ for the second floor.

The advantage of this study is that the data are representative of homes in the United States. However, more up-to-date data are available from the RECS 2005 (DOE, 2008a).

19.3.2.3. U.S. Census Bureau (2009)—American Housing Survey for the United States: 2009

The American Housing Survey (AHS) is conducted by the Census Bureau for the Department of Housing and Urban Development. It collects data on the Nation's housing, including apartments, single-family homes, mobile homes, vacant housing units, household characteristics, housing quality, foundation type, drinking water source, equipment and fuels, and housing unit size. National data are collected in odd-numbered years, and data for each of 47 selected Metropolitan Areas are collected about every 6 years. The national sample includes about

55,000 housing units. Each metropolitan area samples 4,100 or more housing units. The AHS returns to the same housing units year after year to gather data. The U.S. Census Bureau (2009) lists the number of residential single detached and manufactured/mobile homes in the United States within various categories including seasonal, year-round occupied, and new in the last 4 years, based on the AHS (see Table 19-10). Assuming an 8-foot ceiling, these units have a median size of 385 m³; however, these values do not include multifamily units. It should be mentioned that 8 feet is the most common ceiling height, and Murray (1997) has shown that the effect of the 8-foot ceiling height assumption is not significant.

The advantage of this study is that it was a large national sample and, therefore, representative of the United States. The limitations of these data are that distributions were not provided by the authors, and the analysis did not include multifamily units.

19.3.3. Other Factors

19.3.3.1. Surface Area and Room Volumes

The surface areas of floors are commonly considered in relation to the room or house volume, and their relative loadings are expressed as a surface area-to-volume, or loading ratio. Table 19-11 provides the basis for calculating loading ratios for typical-sized rooms. Constant features in the examples are a room width of 12 feet and a ceiling height of 8 feet (typical for residential buildings), or a ceiling height of 12 feet (typical for some types of commercial buildings).

Volumes of individual rooms are dependent on the building size and configuration, but summary data are not readily available. The exposure assessor is advised to define specific rooms, or assemblies of rooms, that best fit the scenario of interest. Most models for predicting indoor air concentrations specify airflows in m³ per hour and, correspondingly, express volumes in m³. A measurement in ft³ can be converted to m³ by multiplying the value in ft³ by 0.0283 m³/ft³. For example, a bedroom that is 9 feet wide by 12 feet long by 8 feet high has a volume of 864 ft³ or 24.5 m³. Similarly, a living room with dimensions of 12 feet wide by 20 feet long by 8 feet high has a volume of 1,920 ft³ or 54.3 m³, and a bathroom with dimensions of 5 feet by 12 feet by 8 feet has a volume of 480 ft³ or 13.6 m³.

19.3.3.2. Products and Materials

Table 19-12 presents examples of assumed amounts of selected products and materials used in

Chapter 19—Building Characteristics

constructing or finishing residential surfaces (Tucker, 1991). Products used for floor surfaces include adhesive, varnish, and wood stain; and materials used for walls include paneling, painted gypsum board, and wallpaper. Particleboard and chipboard are commonly used for interior furnishings such as shelves or cabinets but could also be used for decking or underlayment. It should be noted that numbers presented in the table for surface area are based on typical values for residences, and they are presented as examples. In contrast to the concept of loading ratios presented above (as a surface area), the numbers in the table also are not scaled to any particular residential volume. In some cases, it may be preferable for the exposure assessor to use professional judgment in combination with the loading ratios given above. For example, if the exposure scenario involves residential carpeting, either as an indoor source or as an indoor sink, then the American Society for Testing and Materials (ASTM) loading ratio of $0.43 \text{ m}^2\text{m}^{-3}$ for floor materials could be multiplied by an assumed residential volume and assumed fractional coverage of carpeting to derive an estimate of the surface area. More specifically, a residence with a volume of 300 m^3 , a loading ratio of $0.43 \text{ m}^2\text{m}^{-3}$, and coverage of 80%, would have 103 m^2 of carpeting. The estimates discussed here relate to macroscopic surfaces; the true surface area for carpeting, for example, would be considerably larger because of the nature of its fibrous material.

19.3.3.3. Loading Ratios

The loading ratios for the 8-foot ceiling height range from $0.98 \text{ m}^2\text{m}^{-3}$ to $2.18 \text{ m}^2\text{m}^{-3}$ for wall areas and from $0.36 \text{ m}^2\text{m}^{-3}$ to $0.44 \text{ m}^2\text{m}^{-3}$ for floor area. In comparison, ASTM Standard E 1333 (ASTM, 1990), for large-chamber testing of formaldehyde levels from wood products, specifies the following loading ratios: (1) $0.95 \text{ m}^2\text{m}^{-3}$ for testing plywood (assumes plywood or paneling on all four walls of a typical size room); and (2) $0.43 \text{ m}^2\text{m}^{-3}$ for testing particleboard (assumes that particleboard decking or underlayment would be used as a substrate for the entire floor of a structure).

19.3.3.4. Mechanical System Configurations

Mechanical systems for air movement in residences can affect the migration and mixing of pollutants released indoors and the rate of pollutant removal. Three types of mechanical systems are (1) systems associated with heating, ventilating, and air conditioning (HVAC); (2) systems whose primary function is providing localized exhaust; and

(3) systems intended to increase the overall air exchange rate of the residence.

Portable space heaters intended to serve a single room, or a series of adjacent rooms, may or may not be equipped with blowers that promote air movement and mixing. Without a blower, these heaters still have the ability to induce mixing through convective heat transfer. If the heater is a source of combustion pollutants, as with unvented gas or kerosene space heaters, then the combination of convective heat transfer and thermal buoyancy of combustion products will result in fairly rapid dispersal of such pollutants. The pollutants will disperse throughout the floor where the heater is located and to floors above the heater, but will not disperse to floors below.

Central forced-air HVAC systems are common in many residences. Such systems, through a network of supply/return ducts and registers, can achieve fairly complete mixing within 20 to 30 minutes (Koontz et al., 1988). The air handler for such systems is commonly equipped with a filter (see Figure 19-2) that can remove particle-phase contaminants. Further removal of particles, via deposition on various room surfaces (see Section 19.5.5), is accomplished through increased air movement when the air handler is operating.

Figure 19-2 also distinguishes forced-air HVAC systems by the return layout in relation to supply registers. The return layout shown in the upper portion of the figure is the type most commonly found in residential settings. On any floor of the residence, it is typical to find one or more supply registers to individual rooms, with one or two centralized return registers. With this layout, supply/return imbalances can often occur in individual rooms, particularly if the interior doors to rooms are closed. In comparison, the supply/return layout shown in the lower portion of the figure by design tends to achieve a balance in individual rooms or zones. Airflow imbalances can also be caused by inadvertent duct leakage to unconditioned spaces such as attics, basements, and crawl spaces. Such imbalances usually depressurize the house, thereby increasing the likelihood of contaminant entry via soil-gas transport or through spillage of combustion products from vented fossil-fuel appliances such as fireplaces and gas/oil furnaces.

Mechanical devices such as kitchen fans, bathroom fans, and clothes dryers are intended primarily to provide localized removal of unwanted heat, moisture, or odors. Operation of these devices tends to increase the air exchange rate between the indoors and outdoors. Because local exhaust devices are designed to be near certain indoor sources, their

effective removal rate for locally generated pollutants is greater than would be expected from the dilution effect of increased air exchange. Operation of these devices also tends to depressurize the house, because replacement air usually is not provided to balance the exhausted air.

An alternative approach to pollutant removal is one which relies on an increase in air exchange to dilute pollutants generated indoors. This approach can be accomplished using heat recovery ventilators (HRVs) or energy recovery ventilators (ERVs). Both types of ventilators are designed to provide balanced supply and exhaust airflows and are intended to recover most of the energy that normally is lost when additional outdoor air is introduced. Although ventilators can provide for more rapid dilution of internally generated pollutants, they also increase the rate at which outdoor pollutants are brought into the house. A distinguishing feature of the two types is that ERVs provide for recovery of latent heat (moisture) in addition to sensible heat. Moreover, ERVs typically recover latent heat using a moisture-transfer device such as a desiccant wheel. It has been observed in some studies that the transfer of moisture between outbound and inbound air streams can result in some re-entrainment of indoor pollutants that otherwise would have been exhausted from the house (Andersson et al., 1993). Inadvertent air communication between the supply and exhaust air streams can have a similar effect.

Studies quantifying the effect of mechanical devices on air exchange using tracer-gas measurements are uncommon and typically provide only anecdotal data. The common approach is for the expected increment in the air exchange rate to be estimated from the rated airflow capacity of the device(s). For example, if a device with a rated capacity of 100 ft³ per minute, or 170 m³ per hour, is operated continuously in a house with a volume of 400 m³, then the expected increment in the air exchange rate of the house would be 170 m³ hour⁻¹/400 m³, or approximately 0.4 ACH.

U.S. DOE RECS contains data on residential heating characteristics. The data show that most homes in the United States have some kind of heating and air conditioning system (DOE, 2008a). The types of system vary regionally within the United States. Table 19-13 shows the type of primary and secondary heating systems found in U.S. residences. The predominant primary heating system in the Midwest is natural gas (used by 72% of homes there) while most homes in the South (54%) primarily heat with electricity. Nationwide, 31% of residences have a secondary heating source, typically an electric source.

Table 19-14 shows the type of heating systems found in the United States by urban/rural location. It is noteworthy that 56% of suburban residences use central heating compared to 16% in rural areas. Another difference is that only 25% of residences in cities used a secondary heating system, which used typically electric, compared to 48% in rural areas, typically electric or wood.

Table 19-15 shows that 84% of U.S. residences have some type of cooling system: 59% have central air while 26% use window units. Like heating systems, cooling system type varies regionally as well. In the South, 97% of residences have either central or room air conditioning units whereas only 57% of residences in the Western United States have air conditioning. Frequency of use varies regionally as well. About 61% of residences in the South use their air conditioner all summer long, but only 15% do so in the Northeast.

19.3.3.5. Type of Foundation

The type of foundation of a residence is of interest in residential exposure assessment. It provides some indication of the number of stories and house configuration, as well as an indication of the relative potential for soil-gas transport. For example, such transport can occur readily in homes with enclosed crawl spaces. Homes with basements provide some resistance, but still have numerous pathways for soil-gas entry. By comparison, homes with crawl spaces open to the outside have significant opportunities for dilution of soil gases prior to transport into the house. Using data from the 2009 AHS, of total housing units in the United States, 33% have a basement under the entire building, 10% have a basement under part of the building, 23% have a crawl space, and 32% are on a concrete slab (U.S. Census Bureau, 2009).

19.3.3.5.1. Lucas et al. (1992)—National Residential Radon Survey

The estimated percentage of homes with a full or partial basement according to the National Residential Radon Survey of 5,700 households nationwide was 45% (see Table 19-16) (Lucas et al., 1992). The National Residential Radon Survey provides data for more refined geographical areas, with a breakdown by the 10 U.S. EPA Regions. The New England region (i.e., U.S. EPA Region 1), which includes Connecticut, Maine, Massachusetts, New Hampshire, Rhode Island, and Vermont, had the highest prevalence of basements (93%). The lowest prevalence (4%) was for the South Central region (i.e., U.S. EPA Region 6), which includes Arkansas,

Chapter 19—Building Characteristics

Louisiana, New Mexico, Oklahoma, and Texas. Section 19.3.3.5.2 presents the States associated with each census region and U.S. EPA region.

19.3.3.5.2. U.S. DOE (2008a)—Residential Energy Consumption Survey (RECS)

The most recent RECS (described in Section 19.3.1.1) was administered in 2005 to over 4,381 households (DOE, 2008a). The type of information requested by the survey questionnaire included the type of foundation for the residence (i.e., basement, enclosed crawl space, crawl space open to outside, or concrete slab). This information was not obtained for multifamily structures with five or more dwelling units or for mobile homes. U.S. EPA analyzed the RECS 2005 data (DOE, 2008a) to estimate the percentage of residences with basements and different foundation types by census region and by U.S. EPA region. Table 19-17 presents these estimates. Table 19-18 shows the states associated with each U.S. EPA region and census region. Table 19-19 presents estimates of the percentage of residences with each foundation type, by census region, and for the entire United States. The percentages can add up to more than 100% because some residences have more than one type of foundation; for example, many split-level structures have a partial basement combined with some crawlspace that typically is enclosed. The data in Table 19-19 indicate that 40.6% of residences nationwide have a basement. It also shows that a large fraction of homes have concrete slabs (46%). There are also variations by census region. For example, around 73% and 68% of the residences in the Northeast and Midwest regions, respectively, have basements. In the South and West regions, the predominant foundation type is concrete slab.

The advantage of this study is that it had a large sample size, and it was representative of houses in the United States. Also, it included various housing types. A limitation of this analysis is that homes have multiple foundation types, and the analysis does not provide estimates of square footage for each type of foundation.

19.4. NON-RESIDENTIAL BUILDING CHARACTERISTICS STUDIES

19.4.1. U.S. DOE (2008b)—Non-Residential Building Characteristics—Commercial Buildings Energy Consumption Survey (CBECS)

The U.S. Department of Energy conducts the CBECS to collect data on the characteristics and energy use of commercial buildings. The survey is conducted every 4 years. The latest survey for which data are available (released in 2008) is the 2003 CBECS. CBECS defines “Commercial” buildings as all buildings in which at least half of the floorspace is used for a purpose that is not residential, industrial, or agricultural, so they include building types that might not traditionally be considered commercial, such as schools, correctional institutions, and buildings used for religious worship.

CBECS is a national survey of U.S. buildings that DOE first conducted in 1979. The 2003 CBECS provided nationwide estimates for the United States based upon a weighted statistical sample of 5,215 buildings. DOE releases a data set about the sample buildings for public use. The 2003 CBECS Public Use Microdata set includes data for 4,820 non-mall commercial buildings (DOE, 2008b). A second data set available that includes information on malls, lacks building characteristics data. Building characteristics data provided by CBECS includes floor area, number of floors, census division, heating and cooling design, principal building activity, number of employees, and weighting factors. The 2003 CBECS data survey provides the best statistical characterization of the commercial sector available for the United States. A 2007 CBECS was conducted, but the data were not publicly available at the time this handbook was published.

In 2010, U.S. EPA conducted an analysis of the U.S. DOE CBECS 2003 data, released in 2008. Table 19-20 shows that non-residential buildings vary greatly in volumes. The table shows average volume for a numbers of structures including offices (5,036 m³), restaurants (food services) (1,889 m³), schools (education) (8,694 m³), hotels (lodging) (11,559 m³), and enclosed shopping malls (287,978 m³). Each of these structures varies considerably in size as well. The large shopping malls are over 500,000 m³ (90th percentile). The most numerous of the non-residential buildings are office buildings (18%), non-food service buildings (13%), and warehouses (13%).

Table 19-21 presents data on the number of hours various types of non-residential buildings are open for business and the number of employees that

work in such buildings. In general, places of worship have the most limited hours. The average place of worship is open 32 hours per week. On the other extreme are healthcare facilities, which are open 168 hours a week (24 hours per day, 7 days per week). The average restaurant is open 86 hours per week. Hours vary considerably by building type. Some offices, labs, warehouses, restaurants, police stations, and hotels are also open 24 hours per day, 7 days per week, as reflected by the 90th percentiles. Table 19-21 also presents the number of employees typically employed in such buildings during the main shift. Overall, the average building houses 16 workers during its primary shift, but some facilities employ many more. The average hospital employs 471 workers during its main shift, although those in the 10th percentile employ only 175, and those in the 90th employ 2,250.

CBECS data on heating and cooling sources were tabulated by the U.S. Energy Information Administration of the U.S. DOE and released to the public (along with the data) in 2008 (DOE, 2008b). Table 19-22 and Table 19-23 present these data. Table 19-22 indicates that electricity and natural gas are the heating sources used by a majority of non-residential buildings. Of those buildings heated by fuel oil, most are older buildings.

Table 19-23 describes non-residential building cooling characteristics. About 78% (i.e., 3,625/4,645) of non-residential buildings have air conditioning, but this varies regionally from 14% in the Northeast to 41% in the South. Nationwide, 77% (i.e., 3,589/4,645) of non-residential buildings use electricity for air conditioning. The remaining fraction use natural gas or chilled water.

It should be noted, however, that there are many critical exposure assessment elements not addressed by CBECS. These include a number of elements discussed in more detail in the Residential Building Characteristics Studies section (i.e., Section 19.3). Data to characterize the room volume, products and materials, loading ratios, and foundation type for non-residential buildings were not available in CBECS.

Another characteristic of non-residential buildings needed in ventilation and air exchange calculations is ceiling height. In the residential section of this chapter, ceiling height was assumed to be 8 feet, a figure often assumed for residential buildings. For non-residential buildings, U.S. EPA has assumed a 20 foot ceiling height for warehouses and enclosed shopping malls and a 12-foot average ceiling height for other structures. These assumptions are based on professional judgment. Murray (1997) found that the impact of assuming an 8-foot ceiling

height for residences was insignificant, but non-residential ceiling height varies more greatly and may or may not have a significant impact on calculations.

19.5. TRANSPORT RATE STUDIES

19.5.1. Air Exchange Rates

Air exchange is the balanced flow into and out of a building and is composed of three processes: (1) infiltration—air leakage through random cracks, interstices, and other unintentional openings in the building envelope; (2) natural ventilation—airflows through open windows, doors, and other designed openings in the building envelope; and (3) forced or mechanical ventilation—controlled air movement driven by fans. For nearly all indoor exposure scenarios, air exchange is treated as the principal means of diluting indoor concentrations. The air exchange rate is generally expressed in terms of ACH (with units of hours⁻¹). It is defined as the ratio of the airflow (m³ hours⁻¹) to the volume (m³). Thus, ACH and building size and volume are negatively correlated.

No measurement surveys have been conducted to directly evaluate the range and distribution of building air exchange rates. Although a significant number of air exchange measurements have been carried out over the years, there has been a diversity of protocols and study objectives. Since the early 1980s, however, an inexpensive PFT technique has been used to measure time-averaged air exchange and interzonal airflows in thousands of occupied residences using essentially similar protocols (Dietz et al., 1986). The PFT technique utilizes miniature permeation tubes as tracer emitters and passive samplers to collect the tracers. The passive samplers are returned to the laboratory for analysis by gas chromatography. These measurement results have been compiled to allow various researchers to access the data (Versar, 1990).

With regard to residential air exchange, an attached garage can negatively impact indoor air quality. In addition to automobile exhaust, people often store gasoline, oil, paints, lacquers, and yard and garden supplies in garages. Appliances such as furnaces, heaters, hot water heaters, dryers, gasoline-powered appliances, and wood stoves may also impact indoor air quality. Garages can be a source of volatile organic compounds (VOCs) such as benzene, toluene, ethylbenzene, *m,p*-xylene, and *o*-xylene. Emmerich et al. (2003) conducted a literature review on indoor air quality and the transport of pollutants from attached garages to residential living spaces. The authors found the body

Chapter 19—Building Characteristics

of literature on the subject was limited and contained little data with regard to airtightness and geometry of the house-garage interface, and the impact of heating and cooling equipment. They concluded, however, that there is substantial evidence that the transport of contaminants from garages has the potential to negatively impact residences.

19.5.1.1. Key Study of Residential Air Exchange Rates

**19.5.1.1.1. Koontz and Rector (1995)—
Estimation of Distributions for
Residential Air Exchange Rates**

In analyzing the composite data from various projects (2,971 measurements), Koontz and Rector (1995) assigned weights to the results from each state to compensate for the geographic imbalance in locations where PFT measurements were taken. The results were weighted in such a way that the resultant number of cases would represent each state in proportion to its share of occupied housing units, as determined from the 1990 U.S. Census of Population and Housing.

Table 19-24 shows summary statistics from the Koontz and Rector (1995) analysis, for the country as a whole and by census regions. Based on the statistics for all regions combined, the authors suggested that a 10th percentile value of 0.18 ACH would be appropriate as a conservative estimator for air exchange in residential settings, and that the 50th percentile value of 0.45 ACH would be appropriate as a typical air exchange rate. In applying conservative or typical values of air exchange rates, it is important to realize the limitations of the underlying database. Although the estimates are based on thousands of measurements, the residences represented in the database are not a random sample of the U.S. housing stock. Also, the sample population is not balanced in terms of geography or time of year, although statistical techniques were applied to compensate for some of these imbalances. In addition, PFT measurements of air exchange rates assume uniform mixing of the tracer within the building. This is not always so easily achieved. Furthermore, the degree of mixing can vary from day to day and house to house because of the nature of the factors controlling mixing (e.g., convective air monitoring driven by weather, and type and operation of the heating system). The relative placement of the PFT source and the sampler can also cause variability and uncertainty. It should be noted that sampling is typically done in a single location in a house that may not represent the average from that house. In addition, very high and very low values of air

exchange rates based on PFT measurements have greater uncertainties than those in the middle of the distribution. Despite such limitations, the estimates in Table 19-24 are believed to represent the best available information on the distribution of air exchange rates across U.S. residences throughout the year.

19.5.1.2. Relevant Studies of Residential Air Exchange Rates

**19.5.1.2.1. Nazaroff et al. (1988)—Radon Entry
via Potable Water**

Nazaroff et al. (1988) aggregated the data from two studies conducted earlier using tracer-gas decay. At the time these studies were conducted, they were the largest U.S. studies to include air exchange measurements. The first (Grot and Clark, 1979) was conducted in 255 dwellings occupied by low-income families in 14 different cities. The geometric mean \pm standard deviation for the air exchange measurements in these homes, with a median house age of 45 years, was 0.90 ± 2.13 ACH. The second study (Grimsrud et al., 1983) involved 312 newer residences, with a median age of less than 10 years. Based on measurements taken during the heating season, the geometric mean \pm standard deviation for these homes was 0.53 ± 1.71 ACH. Based on an aggregation of the two distributions with proportional weighting by the respective number of houses studied, Nazaroff et al. (1988) developed an overall distribution with a geometric mean of 0.68 ACH and a geometric standard deviation of 2.01.

**19.5.1.2.2. Versar (1990)—Database of PFT
Ventilation Measurements**

The residences included in the PFT database do not constitute a random sample across the United States. They represent a compilation of homes visited in the course of about 100 separate field-research projects by various organizations, some of which involved random sampling, and some of which involved judgmental or fortuitous sampling. Table 19-25 summarizes the larger projects in the PFT database, in terms of the number of measurements (samples), states where samples were taken, months when samples were taken, and summary statistics for their respective distributions of measured air exchange rates. For selected projects (Lawrence Berkeley Laboratory, Research Triangle Institute, Southern California—SOCAL), multiple measurements were taken for the same house, usually during different seasons. A large majority of the measurements are from the SOCAL project that was

conducted in Southern California. The means of the respective studies generally range from 0.2 to 1.0 ACH, with the exception of two California projects—RTI2 and SOCAL2. Both projects involved measurements in Southern California during a time of year (July) when windows would likely be opened by many occupants.

The limitation of this study is that the PFT database did not base its measurements on a sample that was statistically representative of the national housing stock. PFT has been found to underpredict seasonal average air exchange by 20 to 30% (Sherman, 1989). Using PFT to determine air exchange can produce significant errors when conditions in the measurement scene greatly deviate from idealizations calling for constant, well-mixed conditions.

19.5.1.2.3. Murray and Burmaster (1995)—Residential Air Exchange Rates in the United States: Empirical and Estimated Parametric Distributions by Season and Climatic Region

Murray and Burmaster (1995) analyzed the PFT database using 2,844 measurements (essentially the same cases as analyzed by Koontz and Rector (1995), but without the compensating weights). These authors summarized distributions for subsets of the data defined by climate region and season. The months of December, January, and February were defined as winter; March, April, and May were defined as spring; and so on. Table 19-26 summarizes the results of Murray and Burmaster (1995). Neglecting the summer results in the colder regions, which have only a few observations, the results indicate that the highest air exchange rates occur in the warmest climate region during the summer. As noted earlier, many of the measurements in the warmer climate region were from field studies conducted in Southern California during a time of year (July) when windows would tend to be open in that area. Data for this region in particular should be used with caution because other areas within this region tend to have very hot summers, and residences use air conditioners, resulting in lower air exchange rates. The lowest rates generally occur in the colder regions during the fall.

19.5.1.2.4. Diamond et al. (1996)—Ventilation and Infiltration in High-Rise Apartment Buildings

Diamond et al. (1996) studied air flow in a 13-story apartment building and concluded that “the ventilation to the individual units varies

considerably.” With the ventilation system disabled, units at the lower level of the building had adequate ventilation only on days with high temperature differences, while units on higher floors had no ventilation at all. At times, units facing the windward side were over-ventilated. With the mechanical ventilation system operating, they found wide variation in the air flows to individual apartments. Diamond et al. (1996) also conducted a literature review and concluded there were little published data on air exchange in multifamily buildings, and that there was a general problem measuring, modeling, and designing ventilation systems for high-rise multifamily buildings. Air flow was dependent upon building type, occupation behavior, unit location, and meteorological conditions.

19.5.1.2.5. Graham et al. (2004)—Contribution of Vehicle Emissions From an Attached Garage to Residential Indoor Air Pollution Levels

There have been several studies of vehicle emission seepage into homes from attached garages, which examined a single home. Graham et al. (2004) conducted a study of vehicle emission seepage of 16 homes with attached garages. On average, 11% of total house leakage was attributed to the house/garage interface (equivalent to an opening of 124 cm²), but this varied from 0.6 to 29.6%. The amount of in-house chemical concentrations attributed to vehicle emissions from the garage varied widely between homes from 9 to 85%. Greater leakage tended to occur in houses where the garage attached to the house on more than one side. The home’s age was not an important factor. Whether the engine was warm or cold when it was started was important because cold-start emissions are dominated by the by-products of incomplete combustion. Cold-start tail pipe emissions were 32 times greater for carbon monoxide (CO), 10 times greater for nitrogen oxide (NO_x), and 18 times greater for total hydrocarbon emissions than hot-start tailpipe emissions.

19.5.1.2.6. Price et al. (2006)—Indoor-Outdoor Air Leakage of Apartments and Commercial Buildings

Price et al. (2006) compiled air exchange rate data from 14 different studies on apartment buildings in the United States and Canada. The authors found that indoor-outdoor air exchange rates seem to be twice as high for apartments as for single-family houses. The observed apartment air exchange rates ranged from 0.5 to 2 ACH.

Chapter 19—Building Characteristics

19.5.1.2.7. Yamamoto et al. (2010)—Residential Air Exchange Rates in Three U.S. Metropolitan Areas: Results From the Relationship Among Indoor, Outdoor, and Personal Air Study 1999–2001

Between 1999 and 2001, Yamamoto et al. (2010) conducted approximately 500 indoor-outdoor air exchange rate (AER) calculations based on residences in metropolitan Elizabeth, NJ; Houston, TX; and Los Angeles, CA. The median AER across these urban areas was 0.71 ACH; 0.87 in CA, 0.88 in NJ, and 0.47 in TX. In Texas, the measured AERs were lower in the summer cooling season (median = 0.37 ACH) than in the winter heating season (median = 0.63 ACH), likely because of the reported use of room air conditioners. The measured AERs in California were higher in summer (median = 1.13 ACH) than in winter (median = 0.61 ACH) because summers in Los Angeles County are less humid than NJ or TX, and residents are more likely to utilize natural ventilation through open windows and screened doors. In New Jersey, air exchange rates in the heating and cooling seasons were similar.

19.5.1.3. Key Study of Non-Residential Air Exchange Rates**19.5.1.3.1. Turk et al. (1987)—Commercial Building Ventilation Rates and Particle Concentrations**

Few air exchange rates for commercial buildings are provided in the literature. Turk et al. (1987) conducted indoor air quality measurements, including air exchange rates, in 38 commercial buildings. The buildings ranged in age from 0.5 to 90 years old. One test was conducted in 36 buildings, and two tests were conducted in 2 buildings. Each building was monitored for 10 working days over a 2-week period yielding a minimum sampling time of 75 hours per building. Researchers found an average ventilation measurement of 1.5 ACH, which ranged from 0.3 to 4.1 ACH with a standard deviation of 0.87. Table 19-27 presents the results by building type.

19.5.2. Indoor Air Models

Achieving adequate indoor air quality in a non-residential building can be challenging. There are many factors that affect indoor air quality in buildings (e.g., building materials, outdoor environment, ventilation systems, operation and maintenance, occupants and their activities). Indoor air models are typically used to study, identify, and

solve problems involving indoor air quality in buildings, as well as to assess efficiency of energy use. Indoor air quality models generally are not software products that can be purchased as "off-the-shelf" items. Most existing software models are research tools that have been developed for specific purposes and are being continuously refined by researchers. Leading examples of indoor air models implemented as software products are as follows:

- CONTAM 3.0—CONTAM was developed at the National Institute of Standards and Technology (NIST) with support from U.S. EPA and the U.S. DOE. Version 3.0 was sponsored by the Naval Surface Warfare Center Dahlgren Division. (Walton and Dols, 2010; Wang et al., 2010; Axley, 1988).
- IAQX—The Indoor Air Quality and Inhalation Exposure model is a Windows-based simulation software package developed by U.S. EPA (Guo, 2000).
- CPIEM—The California Population Indoor Exposure Model was developed for the California Air Resources Board (Rosenbaum et al., 2002).
- TEM—The Total Exposure Model was developed with support from U.S. EPA and the U.S. Air Force (Wilkes and Nuckols, 2000; Wilkes, 1998).
- RISK—RISK was developed by the Indoor Environment Management Branch of the U.S. EPA National Risk Management Research Laboratory (Sparks, 1997).
- TRIM—The Total Risk Integrated Methodology is an ongoing modeling project of U.S. EPA's Office of Air Quality Planning and Standards (Efroymson and Murphy, 2001; Palma et al., 1999).
- TOXLT/TOXST—The Toxic Modeling System Long-Term was developed along with the release of the new version of the U.S. EPA's Industrial Source Complex Dispersion Models (U.S. EPA, 1995).
- MIAQ—The Multi-Chamber Indoor Air Quality Model was developed for the California Institute of Technology and Lawrence Berkeley National Laboratory. Documentation last updated in 2002. (Nazaroff and Cass, 1989b, 1986).
- MCCEM—the Multi-Chamber Consumer Exposure Model was developed for U.S. EPA Office of Pollution Prevention and Toxics (EPA/OPPT) (Koontz and Nagda, 1991; GeoMet, 1989).

Price (2001) is an evaluation of the use of many of the above products (TOXLT/TOXST, MCCEM, IAQX, CONTAM, CPIEM, TEM, TRIM, and RISK) in a tiered approach to assessing exposures and risks to children. The information provided is also applicable to adults.

19.5.3. Infiltration Models

A variety of mathematical models exist for prediction of air infiltration rates in individual buildings. A number of these models have been reviewed, for example, by Liddament and Allen (1983), and by Persily and Linteris (1983). Basic principles are concisely summarized in the ASHRAE Handbook of Fundamentals (ASHRAE, 2009). These models have a similar theoretical basis; all address indoor-outdoor pressure differences that are maintained by the actions of wind and stack (temperature difference) effects. The models generally incorporate a network of airflows where nodes representing regions of different pressure are interconnected by leakage paths. Individual models differ in details such as the number of nodes they can treat or the specifics of leakage paths (e.g., individual components such as cracks around doors or windows versus a combination of components such as an entire section of a building). Such models are not easily applied by exposure assessors, however, because the required inputs (e.g., inferred leakage areas, crack lengths) for the model are not easy to gather.

Another approach for estimating air infiltration rates is developing empirical models. Such models generally rely on the collection of infiltration measurements in a specific building under a variety of weather conditions. The relationship between the infiltration rate and weather conditions can then be estimated through regression analysis and is usually stated in the following form:

$$A = a + b |T_i - T_o| + cU^n \tag{Eqn. 19-1}$$

where:

- A = air infiltration rate (hours⁻¹),
- T_i = indoor temperature (°C),
- T_o = outdoor temperature (°C),
- U = windspeed (m/second),
- n is an exponent with a value typically between 1 and 2, and
- a , b and c are parameters to be estimated.

Relatively good predictive accuracy usually can be obtained for individual buildings through this approach. However, exposure assessors often do not have the information resources required to develop parameter estimates for making such predictions.

A reasonable compromise between the theoretical and empirical approaches has been developed in the model specified by Dietz et al. (1986). The model, drawn from correlation analysis of environmental measurements and air infiltration data, is formulated as follows:

$$A = L \left(0.006\Delta T \frac{0.03}{C} U^{1.5} \right) \tag{Eqn. 19-2}$$

where:

- A = average ACH or infiltration rate, hours⁻¹,
- L = generalized house leakiness factor (1 < L < 5),
- C = terrain sheltering factor (1 < C < 10),
- ΔT = indoor-outdoor temperature difference (°C), and
- U = windspeed (m/second).

The value of L is greater as house leakiness increases, and the value of C is greater as terrain sheltering (reflects shielding of nearby wind barrier) increases. Although the above model has not been extensively validated, it has intuitive appeal, and it is possible for the user to develop reasonable estimates for L and C with limited guidance. Historical data from various U.S. airports are available for estimation of the temperature and windspeed parameters. As an example application, consider a house that has central values of 3 and 5 for L and C , respectively. Under conditions where the indoor temperature is 20°C (68°F), the outdoor temperature is 0°C (32°F), and the windspeed is 5 m/second, the predicted infiltration rate for that house would be 3 (0.006 × 20 + 0.03/5 × 51.5), or 0.56 ACH. This prediction applies under the condition that exterior doors and windows are closed and does not include the contributions, if any, from mechanical systems (see Section 19.3.3.4). Occupant behavior, such as opening windows, can, of course, overwhelm the idealized effects of temperature and wind speed.

Chan et al. (2005) analyzed the U.S. Residential Air Leakage database at Lawrence Berkley National Laboratory (LBNL) containing 73,000 air leakage measurements from 30 states (predominantly Ohio,

Chapter 19—Building Characteristics

Alaska, and Wisconsin). They present the following equation for estimating ACH:

$$ACH = 48 \left(\frac{2.5}{H} \right)^{0.3} \frac{NL}{HF} [h^{-1}] \quad (\text{Eqn. 19-3})$$

where:

<i>ACH</i>	= air changes per hour,
<i>H</i>	= building height (meters),
<i>NL</i>	= normalized leakage (unitless),
<i>F</i>	= scaling factor (unitless), and
<i>h</i>	= hours.

Chan et al. (2005) found that “older and smaller homes are more likely to have higher normalized leakage areas than newer and larger ones.” Table 19-28 summarizes the normalized leakage distributions in the United States.

It should be noted that newer homes were generally built tighter until about 1997 when the construction trend leveled off. Sherman and Matson (2002) also examined LBNL’s U.S. Residential Air Leakage database and found that average normalized leakage for 22,000 houses already in the database was 1.18 *NL* (total leakage cm^2 normalized for dwelling size m^2), but leakage among the 8,700 newer homes averaged 0.30 *NL*.

19.5.4. Vapor Intrusion

In 1998, concerns about subsurface contamination of soil or ground water impacting indoor air quality led the U.S. EPA to develop a series of models for estimating health risks from subsurface vapor intrusion into buildings based on the analytical solutions of Johnson and Ettinger (1991). Since that time, the models have been revised, and new models have been added. The 3-phase soil contamination models theoretically partition the contamination into three discrete phases: (1) in solution with water, (2) sorbed to the soil organic carbon, and (3) in vapor phase within the air-filled pores of the soil. Two new models have been added, allowing the user to estimate vapor intrusion into buildings from measured soil gas data. When Non-Aqueous Phase Liquid (NAPL) is present in soils, the contamination includes a fourth or residual phase. In such cases, the new NAPL models can be used to estimate the rate of vapor intrusion into buildings and the associated health risks. The new NAPL models use a numerical approach for simultaneously solving the

time-averaged soil and building vapor concentration for each of up to 10 soil contaminants. This involves a series of iterative calculations for each contaminant. These models are available online from U.S. EPA at http://www.epa.gov/oswer/riskassessment/airmodel/johnson_ettinger.htm.

19.5.5. Deposition and Filtration

Deposition refers to the removal of airborne substances to available surfaces that occurs as a result of gravitational settling and diffusion, as well as electrophoresis and thermophoresis. Filtration is driven by similar processes but is confined to material through which air passes. Filtration is usually a matter of design, whereas deposition is a matter of fact.

19.5.5.1. Deposition

The deposition of particulate matter and reactive gas-phase pollutants to indoor surfaces is often stated in terms of a characteristic deposition velocity (m hour^{-1}) allied to the surface-to-volume ratio ($\text{m}^2 \text{m}^{-3}$) of the building or room interior, forming a first order loss rate (hour^{-1}) similar to that of air exchange. Theoretical considerations specific to indoor environments have been summarized in comprehensive reviews by Nazaroff and Cass (1989a) and Nazaroff et al. (1993).

For airborne particles, deposition rates depend on aerosol properties (size, shape, density) as well as room factors (thermal gradients, turbulence, surface geometry). The motions of larger particles are dominated by gravitational settling; the motions of smaller particles are subject to convection and diffusion. Consequently, larger particles tend to accumulate more rapidly on floors and up-facing surfaces while smaller particles may accumulate on surfaces facing in any direction. Figure 19-3 illustrates the general trend for particle deposition across the size range of general concern for inhalation exposure ($<10 \mu\text{m}$). The current thought is that theoretical calculations of deposition rates are likely to provide unsatisfactory results due to knowledge gaps relating to near-surface air motions and other sources of inhomogeneity (Nazaroff et al., 1993).

**19.5.5.1.1. Thatcher and Layton (1995)—
Deposition, Resuspension, and
Penetration of Particles Within a
Residence**

Thatcher and Layton (1995) evaluated removal rates for indoor particles in four size ranges (1–5,

5-10, 10-25, and >25 μm) in a study of one house occupied by a family of four. Table 19-29 lists these values. In a subsequent evaluation of data collected in 100 Dutch residences, Layton and Thatcher (1995) estimated settling velocities of 2.7 m hour^{-1} for lead-bearing particles captured in total suspended particulate matter samples.

19.5.5.1.2. Wallace (1996)—Indoor Particles: A Review

In a major review of indoor particles, Wallace (1996) cited overall particle deposition per hour (hour^{-1}) for respirable ($\text{PM}_{2.5}$), inhalable (PM_{10}), and coarse (difference between PM_{10} and $\text{PM}_{2.5}$) size fractions determined from U.S. EPA's Particle Total Exposure Assessment Methodological Study (PTEAM) study. These values, listed in Table 19-30, were derived from measurements conducted in nearly 200 residences.

19.5.5.1.3. Thatcher et al. (2002)—Effects of Room Furnishings and Air Speed on Particle Deposition Rates Indoors

Thatcher et al. (2002) measured deposition loss rate coefficients for particles of different median diameters (0.55 to 8.66 μm) with fans off and on at various airspeeds in three types of experimental rooms: (1) bare (unfurnished with metal floor), (2) carpeted and unfurnished, and (3) fully furnished. They concluded that large particles (over 25 μm) settle eight times faster than small particles (1-5 μm). Table 19-31 summarizes the results.

19.5.5.1.4. He et al. (2005)—Particle Deposition Rates in Residential Houses

He et al. (2005) investigated particle deposition rates for particles ranging in size from 0.015 to 6 μm . The lowest deposition rates were found for particles between 0.2 and 0.3 μm for both minimum (air exchange rate: $0.61 \pm 0.45 \text{ hour}^{-1}$) and normal (air exchange rate: $3.00 \pm 1.23 \text{ hour}^{-1}$) conditions. Thus, air exchange rate was an important factor affecting deposition rates for particles between 0.08 and 1.0 μm , but not for particles smaller than 0.08 μm or larger than 1.0 μm .

19.5.5.2. Filtration

A variety of air cleaning techniques have been applied to residential settings. Basic principles related to residential-scale air cleaning technologies have been summarized in conjunction with reporting early test results (Offermann et al., 1984). General engineering principles are summarized in ASHRAE

(1988). In addition to fibrous filters integrated into central heating and air conditioning systems, extended surface filters and High Efficiency Particle Arrest filters, as well as electrostatic systems, are available to increase removal efficiency. Free-standing air cleaners (portable and/or console) are also being used. Product-by-product test results reported by Hanley et al. (1994); Shaughnessy et al. (1994); and Offerman et al. (1984) exhibit considerable variability across systems, ranging from ineffectual (<1% efficiency) to nearly complete removal.

19.5.6. Interzonal Airflows

Residential structures consist of a number of rooms that may be connected horizontally, vertically, or both horizontally and vertically. Before considering residential structures as a detailed network of rooms, it is convenient to divide them into one or more zones. At a minimum, each floor is typically defined as a separate zone. For indoor air exposure assessments, further divisions are sometimes made within a floor, depending on (1) locations of specific contaminant sources and (2) the presumed degree of air communication among areas with and without sources.

Defining the airflow balance for a multiple-zone exposure scenario rapidly increases the information requirements as rooms or zones are added. As shown in Figure 19-4, a single-zone system (considering the entire building as a single well-mixed volume) requires only two airflows to define air exchange. Further, because air exchange is balanced flow (air does not "pile up" in the building, nor is a vacuum formed), only one number (the air exchange rate) is needed. With two zones, six airflows are needed to accommodate interzonal airflows plus air exchange; with three zones, 12 airflows are required. In some cases, the complexity can be reduced using judicious (if not convenient) assumptions. Interzonal airflows connecting non-adjacent rooms can be set to zero, for example, if flow pathways do not exist. Symmetry also can be applied to the system by assuming that each flow pair is balanced.

Examples of interzonal airflow models include CONTAM (developed by NIST) and COMIS (Feustel and Raynor-Hoosen, 1990).

19.5.7. House Dust and Soil Loadings

House dust is a complex mixture of biologically derived material (animal dander, fungal spores, etc.), particulate matter deposited from the indoor aerosol, and soil particles brought in by foot traffic. House dust may contain VOCs (Hirvonen et al., 1994; Wolkoff and Wilkins, 1994), pesticides from

Chapter 19—Building Characteristics

imported soil particles as well as from direct applications indoors (Roberts et al., 1991), and trace metals derived from outdoor sources (Layton and Thatcher, 1995). The indoor abundance of house dust depends on the interplay of deposition from the airborne state, resuspension due to various activities, direct accumulation, and infiltration.

In the absence of indoor sources, indoor concentrations of particulate matter are significantly lower than outdoor levels. For some time, this observation supported the idea that a significant fraction of the outdoor aerosol is filtered out by the building envelope. More recent data, however, have shown that deposition (incompletely addressed in earlier studies) accounts for the indoor-outdoor contrast, and outdoor particles smaller than 10- μm aerodynamic diameter penetrate the building envelope as completely as non-reactive gases (Wallace, 1996).

It should be noted that carpet dust loadings may be higher than previously believed. This is important because embedded dust is a reservoir for organic compounds. Fortune et al. (2000) compared the mass of dust in carpets removed using conventional vacuuming to that removed by vacuuming with a beater-bar to remove deeply embedded dust. The amount removed was 10 times that removed by conventional vacuuming.

19.5.7.1. Roberts et al. (1991)—Development and Field Testing of a High-Volume Sampler for Pesticides and Toxics in Dust

Dust loadings, reported by Roberts et al. (1991), were measured in conjunction with the Non-Occupational Pesticide Exposure Study (NOPES). In this study, house dust was sampled from a representative grid using a specially constructed high-volume surface sampler. The surface sampler collection efficiency was verified in conformance with ASTM F608 (ASTM, 1989). Table 19-32 summarizes data collected from carpeted areas in volunteer households in Florida encountered during the course of NOPES. Seven of the nine sites were single-family detached homes, and two were mobile homes. The authors noted that the two houses exhibiting the highest dust loadings were only those homes where a vacuum cleaner was not used for housekeeping.

19.5.7.2. Thatcher and Layton (1995)—Deposition, Resuspension, and Penetration of Particles Within a Residence

Relatively few studies have been conducted at the level of detail needed to clarify the dynamics of indoor aerosols. One intensive study of a California residence (Thatcher and Layton, 1995), however, provides instructive results. Using a model-based analysis for data collected under controlled circumstances, the investigators verified penetration of the outdoor aerosol and estimated rates for particle deposition and resuspension (see Table 19-33). The investigators stressed that normal household activities are a significant source of airborne particles larger than 5 μm . During the study, they observed that just walking into and out of a room could momentarily double the concentration. The airborne abundance of submicrometer particles, on the other hand, was unaffected by either cleaning or walking.

Mass loading of floor surfaces (see Table 19-34) was measured in the study of Thatcher and Layton (1995) by thoroughly cleaning the house and sampling accumulated dust, after 1 week of normal habitation and no vacuuming. The methodology, validated under ASTM F608 (ASTM, 1989), showed fine dust recovery efficiencies of 50% with new carpet and 72% for linoleum. Tracked areas showed consistently higher accumulations than untracked areas, confirming the importance of tracked-in material. Differences between tracked areas upstairs and downstairs show that tracked-in material is not readily transported upstairs. The consistency of untracked carpeted areas throughout the house, suggests that, in the absence of tracking, particle transport processes are similar on both floors.

19.6. CHARACTERIZING INDOOR SOURCES

Product- and chemical-specific mechanisms for indoor sources can be described using simple emission factors to represent instantaneous releases, as well as constant releases over defined time periods; more complex formulations may be required for time-varying sources. Guidance documents for characterizing indoor sources within the context of the exposure assessment process are limited [see, for example, U.S. EPA (1987); Wolkoff (1995)]. Fairly extensive guidance exists in the technical literature, however, provided that the exposure assessor has the means to define (or estimate) key mechanisms and chemical-specific parameters. Basic concepts are summarized below for the broad source categories

that relate to airborne contaminants, waterborne contaminants, and for soil/house dust indoor sources.

19.6.1. Source Descriptions for Airborne Contaminants

Table 19-35 summarizes simplified indoor source descriptions for airborne chemicals for direct emission sources (e.g., combustion, pressurized propellant products), as well as emanation sources (e.g., evaporation from “wet” films, diffusion from porous media), and transport-related sources (e.g., infiltration of outdoor air contaminants, soil gas entry).

Direct-emission sources can be approximated using simple formulas that relate pollutant mass released to characteristic process rates. Combustion sources, for example, may be stated in terms of an emission factor, fuel content (or heating value), and fuel consumption (or carrier delivery) rate. Emission factors for combustion products of general concern (e.g., CO, NO_x) have been measured for a number of combustion appliances using room-sized chambers [see, for example, Relwani et al. (1986)]. Other direct-emission sources would include volatiles released from water use and from pressurized consumer products. Resuspension of house dust (see Section 19.5.5.1) would take on a similar form by combining an activity-specific rate constant with an applicable dust mass.

Diffusion-limited sources (e.g., carpet backing, furniture, flooring, dried paint) represent probably the greatest challenge in source characterization for indoor air quality. Vapor-phase organics dominate this group, offering great complexity because (1) there is a fairly long list of chemicals that could be of concern, (2) ubiquitous consumer products, building materials, coatings, and furnishings contain varying amounts of different chemicals, (3) source dynamics may include non-linear mechanisms, and (4) for many of the chemicals, emitting as well as non-emitting materials evident in realistic settings may promote reversible and irreversible sink effects. Very detailed descriptions for diffusion-limited sources can be constructed to link specific properties of the chemical, the source material, and the receiving environment to calculate expected behavior [see, for example, U.S. EPA (1990a); Cussler (1984)]. Validation to actual circumstances, however, suffers practical shortfalls because many parameters simply cannot be measured directly.

The exponential formulation listed in Table 19-35 was derived based on a series of papers generated during the development of chamber testing methodology by U.S. EPA (Dunn and Chen, 1993;

Dunn and Tichenor, 1988; Dunn, 1987). This framework represents an empirical alternative that works best when the results of chamber tests are available. Estimates for the initial emission rate (E_0) and decay factor (k_s) can be developed for hypothetical sources from information on pollutant mass available for release (M) and supporting assumptions.

Assuming that a critical time period (t_c) coincides with reduction of the emission rate to a critical level (E_c) or with the release of a critical fraction of the total mass (M_c), the decay factor can be estimated by solving either of these relationships:

$$\frac{E_c}{E_0} = e^{-k_s t_c} \quad (\text{Eqn. 19-4})$$

where:

- E_c = emission rate to a critical level ($\mu\text{g hour}^{-1}$),
- E_0 = initial emission rate ($\mu\text{g hour}^{-1}$),
- k_s = decay factor ($\mu\text{g hour}^{-1}$), and
- t_c = critical time period (hours),

or

$$\frac{M_c}{M} = 1 - e^{-k_s t_c} \quad (\text{Eqn. 19-5})$$

where:

- M_c = critical mass (μg), and
- M = total mass (μg).

The critical time period can be derived from product-specific considerations (e.g., equating drying time for paint to 90% emissions reduction). Given such an estimate for k_s , the initial emission rate can be estimated by integrating the emission formula to infinite time under the assumption that all chemical mass is released:

$$M = \int_0^{\infty} E_0 e^{-k_s t} dt = \frac{E_0}{k_s} \quad (\text{Eqn. 19-6})$$

The basis for the exponential source algorithm has also been extended to the description of more complex diffusion-limited sources. With these sources, diffusive or evaporative transport at the

Chapter 19—Building Characteristics

interface may be much more rapid than diffusive transport from within the source material, so that the abundance at the source/air interface becomes depleted, limiting the transfer rate to the air. Such effects can prevail with skin formation in "wet" sources like stains and paints [see, for example, Chang and Guo (1992)]. Similar emission profiles have been observed with the emanation of formaldehyde from particleboard with "rapid" decline as formaldehyde evaporates from surface sites of the particleboard over the first few weeks. It is then followed by a much slower decline over ensuing years as formaldehyde diffuses from within the matrix to reach the surface [see, for example, Zinn et al. (1990)].

Transport-based sources bring contaminated air from other areas into the airspace of concern. Examples include infiltration of outdoor contaminants, and soil gas entry. Soil gas entry is a particularly complex phenomenon and is frequently treated as a separate modeling issue (Sextro, 1994; Little et al., 1992). Room-to-room migration of indoor contaminants would also fall under this category, but this concept is best considered using multi-zone models.

19.6.2. Source Descriptions for Waterborne Contaminants

Residential water supplies may be a route for exposure to chemicals through ingestion, dermal contact, or inhalation. These chemicals may appear in the form of contaminants (e.g., trichloroethylene) as well as naturally occurring by-products of water system history (e.g., chloroform, radon). Among indoor water uses, showering, bathing, and hand-washing of dishes or clothes provide the primary opportunities for dermal exposure. The escape of volatile chemicals to the gas phase associates water use with inhalation exposure. The exposure potential for a given chemical will depend on the source of water, the types and extents of water uses, and the extent of volatilization of specific chemicals. Primary types of residential water use include showering/bathing, toilet use, clothes washing, dishwashing, and faucet use (e.g., for drinking, cooking, general cleaning, or washing hands).

Upper-bounding estimates of chemical release rates from water use can be formulated as simple emission factors by combining the concentration in the feed water (g m^{-3}) with the flow rate for the water use ($\text{m}^3 \text{hour}^{-1}$), and assuming that the chemical escapes to the gas phase. For some chemicals, however, not all of the chemical escapes in realistic situations due to diffusion-limited transport and

solubility factors. For inhalation exposure estimates, this may not pose a problem because the bounding estimate would overestimate emissions by no more than approximately a factor of two. For multiple exposure pathways, the chemical mass remaining in the water may be of importance. Refined estimates of volatile emissions are usually considered under two-resistance theory to accommodate mass transport aspects of the water-air system ([see, for example, U.S. EPA (2000); Howard-Reed et al. (1999); Moya et al. (1999); Little (1992); Andelman (1990); McKone (1987)]. More detailed descriptions of models used to estimate emissions from indoor water sources including showers, bathtubs, dishwashers, and washing machines are included in U.S. EPA (2000). Release rates (S) are formulated as

$$S = K_m F_w \left[C_w - \frac{C_a}{H} \right] \quad (\text{Eqn. 19-7})$$

where:

- S = chemical release rate (g hour^{-1}),
- K_m = dimensionless mass-transfer coefficient,
- F_w = water flow rate ($\text{m}^3 \text{hour}^{-1}$),
- C_w = concentration in feed water (g m^{-3}),
- C_a = concentration in air (g m^{-3}), and
- H = dimensionless Henry's Law constant.

Because the emission rate is dependent on the air concentration, recursive techniques are required. The mass-transfer coefficient is a function of water use characteristics (e.g., water droplet size spectrum, fall distance, water film) and chemical properties (diffusion in gas and liquid phases). Estimates of practical value are based on empirical tests to incorporate system characteristics into a single parameter [see, for example, Giardino et al. (1990)]. Once characteristics of one chemical-water use system are known (reference chemical, subscript r), the mass-transfer coefficient for another chemical (index chemical, subscript i) delivered by the same system can be estimated using formulations identified in the review by Little (1992):

$$\begin{aligned} \frac{1}{K} \left(\frac{D_{Li}}{D_{Lr}} \right)^{1/2} &= \frac{1}{K_{Lr}} \\ &= \frac{1}{K_{Gr}} - \frac{1}{H} \left(\frac{D_{Gr}}{D_{Gi}} \right)^{2/3} \left(\frac{D_{Li}}{D_{Lr}} \right)^{1/2} \end{aligned}$$

(Eqn. 19-8)

where:

D_L	= liquid diffusivity ($\text{m}^2 \text{second}^{-1}$),
D_G	= gas diffusivity ($\text{m}^2 \text{second}^{-1}$),
KL	= liquid-phase mass-transfer coefficient,
KG	= gas-phase mass transfer coefficient, and
H	= dimensionless Henry's Law constant.

19.6.3. Soil and House Dust Sources

The rate process descriptions compiled for soil and house dust provide inputs for estimating indoor emission rates:

$$S_d = M_d R_d A_f \quad (\text{Eqn. 19-9})$$

where:

S_d	= dust emission (g hour^{-1}),
M_d	= dust mass loading (g m^{-2}),
R_d	= resuspension rates (hour^{-1}), and
A_f	= floor area (m^2).

Because house dust is a complex mixture, transfer of particle-bound constituents to the gas phase may be of concern for some exposure assessments. For emission estimates, one would then need to consider particle mass residing in each reservoir (dust deposit, airborne).

19.7. ADVANCED CONCEPTS

19.7.1. Uniform Mixing Assumption

Many exposure measurements are predicated on the assumption of uniform mixing within a room or zone of a house. Mage and Ott (1994) offer an extensive review of the history of use and misuse of the concept. Experimental work by Baughman et al. (1994) and Drescher et al. (1995) indicates that, for an instantaneous release from a point source in a room, fairly complete mixing is achieved within 10 minutes when convective flow is induced by solar radiation. However, up to 100 minutes may be required for complete mixing under quiescent (nearly isothermal) conditions. While these experiments were conducted at extremely low air exchange rates

(<0.1 ACH), based on the results, attention is focused on mixing within a room.

The situation changes if a human invokes a point source for a longer period and remains in the immediate vicinity of that source. Personal exposure in the near vicinity of a source can be much higher than the well-mixed assumption would suggest. A series of experiments conducted by GeoMet (1989) for the U.S. EPA involved controlled point-source releases of carbon monoxide tracer (CO), each for 30 minutes. Breathing-zone measurements located within 0.4 m of the release point were 10 times higher than for other locations in the room during early stages of mixing and transport.

Similar investigations conducted by Furtaw et al. (1995) involved a series of experiments in a controlled-environment, room-sized chamber. Furtaw et al. (1995) studied spatial concentration gradients around a continuous point source simulated by sulfur hexafluoride (SF_6) tracer with a human moving about the room. Average breathing-zone concentrations when the subject was near the source exceeded those several meters away by a factor that varied inversely with the ventilation intensity in the room. At typical room ventilation rates, the ratio of source-proximate to slightly-removed concentration was on the order of 2:1.

19.7.2. Reversible Sinks

For some chemicals, the actions of reversible sinks are of concern. For an initially "clean" condition in the sink material, sorption effects can greatly deplete indoor concentrations. However, once enough of the chemical has been adsorbed, the diffusion gradient will reverse, allowing the chemical to escape. For persistent indoor sources, such effects can serve to reduce indoor levels initially, but once the system equilibrates, the net effect on the average concentration of the reversible sink is negligible. Over suitably short time frames, this can also affect integrated exposure. For indoor sources whose emission profile declines with time (or ends abruptly), reversible sinks can serve to extend the emissions period as the chemical desorbs long after direct emissions are finished. Reversible sink effects have been observed for a number of chemicals in the presence of carpeting, wall coverings, and other materials commonly found in residential environments.

Interactive sinks (and models of the processes) are of special importance; while sink effects can greatly reduce indoor air concentrations, re-emission at lower rates over longer time periods could greatly extend the exposure period of concern. For

Chapter 19—Building Characteristics

completely reversible sinks, the extended time could bring the cumulative exposure to levels approaching the sink-free case. Publications (Axley and Lorenzetti, 1993; Tichenor et al., 1991) show that first principles provide useful guidance in postulating models and setting assumptions for reversible-irreversible sink models. Sorption/desorption can be described in terms of Langmuir (monolayer) as well as Brunauer-Emmet-Teller (BET, multilayer) adsorption.

19.8. REFERENCES FOR CHAPTER 19

- Andelman, JB. (1990). Total exposure to volatile organic compounds in potable water. In NM Ram; RF Christman; KP Cantor (Eds.), *Significance and treatment of volatile organic compounds in water supplies* (pp. 485–504). Chelsea, MI: Lewis Publishers.
- Andersson, B; Andersson, K; Sundell, J; Zingmark, PA. (1993). Mass transfer of contaminants in rotary enthalpy exchangers. *Indoor Air* 3: 143-148.
- ASHRAE (American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc.). (1988). [Excerpts from the 1988 Equipment Handbook]. In 1988 ASHRAE Handbook: Equipment. Atlanta, GA: American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc.
- ASHRAE (American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc.). (2009). *The 2009 ASHRAE Handbook-Fundamentals*. Atlanta, GA: American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc. <http://www.ashrae.org/publications/page/2283>.
- ASTM (American Society for Testing and Materials). (1989). Standard laboratory test method for evaluation of carpet-embedded dirt removal effectiveness of household vacuum cleaners [Standard]. (Standard F 608-89). Philadelphia, PA.
- ASTM (American Society for Testing and Materials). (1990). Standard test method for determining formaldehyde levels from wood products under defined conditions using a large chamber [Standard]. (Standard E 1333 90). Philadelphia, PA.
- Axley, JW. (1988). Progress toward a general analytical method for predicting indoor air pollution in buildings: Indoor air quality modeling phase III report. (NBSIR 88-3814). Gaithersburg, MD: National Bureau of Standards.
- Axley, JW. (1989). Multi-zone dispersal analysis by element assembly. *Build Environ* 24: 113-130. [http://dx.doi.org/10.1016/0360-1323\(89\)90001-2](http://dx.doi.org/10.1016/0360-1323(89)90001-2).
- Axley, JW; Lorenzetti, D. (1993). Sorption transport models for indoor air quality analysis. In NL Nagda (Ed.), *Modeling of indoor air quality and exposure* (pp. 105-127). Philadelphia, PA: American Society for Testing and Materials.
- Baughman, AV; Gadgil, AJ; Nazaroff, WW. (1994). Mixing of a point source pollutant by natural convection flow within a room. *Indoor Air* 4: 114-122. <http://dx.doi.org/10.1111/j.1600-0668.1994.t01-2-00006.x>.
- Chan, WR; Nazaroff, WW; Price, PN; Sohn, MD; Gadgil, AJ. (2005). Analyzing a database of residential air leakage in the United States. *Atmos Environ* 39: 3445-3455.
- Chang, J; Guo, Z. (1992). Characterization of organic emissions from a wood finishing product-wood stain. *Indoor Air* 2: 146-153.
- Cussler, EL. (1984). *Diffusion: Mass transfer in fluid systems*. Cambridge, UK: Cambridge University Press.
- Diamond, RC; Feustel, HE; Dickerhoff, DJ. (1996). Ventilation and infiltration in high-rise apartment buildings. (LBL-38103). Berkeley, CA: University of California Berkeley, Lawrence Berkeley Laboratory.
- Dietz, RN; Goodrich, RW; Cote, EA; Wieser, RF. (1986). Detailed description and performance of a passive perfluorocarbon tracer system for building ventilation and air exchange measurements. In *Measured air leakage of buildings: A symposium* (pp. 203–264). (ASTM STP 904). Philadelphia, PA: American Society for Testing and Materials.
- DOE (U.S. Department of Energy). (2008a). Residential Energy Consumption Survey (RECS). (DOE/EIA-0314(93)). Washington, DC: U.S. Department of Energy, Energy Information Administration.
- DOE (U.S. Department of Energy). (2008b). U.S. EPA analysis of survey data. Commercial buildings energy consumption survey (CBECS). Form EIA-871A.
- Drescher, A; Lobascio, C; Gadgil, A; Nazaroff, W. (1995). Mixing of a Point Source Indoor Pollutant by Forced Convection. *Indoor Air* 5: 204-214.

Chapter 19—Building Characteristics

- Dunn, JE. (1987). Models and statistical methods for gaseous emission testing of finite sources in well-mixed chambers. *Atmos Environ* 21: 425-430.
- Dunn, JE; Chen, T. (1993). Critical evaluation of the diffusion hypothesis in the theory of porous media volatile organic compounds (VOC) sources and sinks. In *Modeling of indoor air quality and exposure* (pp. 64–80). (ASTM STP 1205). Philadelphia, PA: American Society for Testing and Materials.
- Dunn, JE; Tichenor, BA. (1988). Compensating for sink effects in emissions test chambers by mathematical modeling. 22: 885-894. [http://dx.doi.org/10.1016/0004-6981\(88\)90265-X](http://dx.doi.org/10.1016/0004-6981(88)90265-X).
- Efroymson, RA; Murphy, DL. (2001). Ecological risk assessment of multimedia hazardous air pollutants: Estimating exposure and effects. *Sci Total Environ* 274: 219-230. [http://dx.doi.org/10.1016/S0048-9697\(01\)00745-8](http://dx.doi.org/10.1016/S0048-9697(01)00745-8).
- Emmerich, S; Gorfain, J; Howard-Reed, C. (2003). Air and Pollutant Transport from Attached Garages to Residential Living Spaces—Literature Review and Field Tests. *Int J Vent* 2.
- Feustel, HE; Raynor-Hoosen, A. (1990). Fundamentals of the multizone airflow model COMIS. (Technical note AIVC 29). Coventry, UK: Air Infiltration and Ventilation Centre.
- Fortune, CR; Blanchard, FT; Elleson, WD; Lewis, RG. (2000). Analysis of aged in-home carpeting to determine the distribution of pesticide residues between dust, carpet, and pad compartments [EPA Report]. (EPA/600/R-00/030). Research Triangle Park, NC: U.S. Environmental Protection Agency.
- Furtaw, EJ; Pandian, MD; Nelson, DR; Behar, JV. (1995). Modeling indoor air concentrations near emission sources in perfectly mixed rooms: Engineering solutions to indoor air quality problems. Presentation presented at Sixth Conference of the International Society for Environmental Epidemiology and Fourth Conference of the International Society for Exposure Analysis (Joint Conference), September 1994, Research Triangle Park, NC.
- GeoMet (GeoMet Incorporated). (1989). Assessment of indoor air pollutant exposure within building zones. (IE-2149). Washinton, DC: U.S. Environmental Protection Agency.
- Giardino, NJ; Gumerman, E; Esmen, NA; Andelman, JB; Wilkes, CR; Small, MJ. (1990). Real-time air measurements of trichloroethylene in domestic bathrooms using contaminated water.
- Graham, LA; Noseworthy, L; Fugler, D; O'Leary, K; Karman, D; Grande, C. (2004). Contribution of vehicle emissions from an attached garage to residential indoor air pollution levels. *J Air Waste Manag Assoc* 54: 563-584.
- Grimsrud, DT; Sherman, MH; Sonderegger, RC. (1983). Calculating infiltration: implications for a construction quality standard.
- Grot, RA; Clark, RE. (1979). Air leakage characteristics and weatherization techniques for low-income housing.
- Guo, Z, . (2000). Simulation tool kit for indoor air quality and inhalation exposure (IAQX) version 1.0 user's guide. (EPA-600/R-00/094). RTP, NC: U.S. Environmental Protection Agency. <http://nepis.epa.gov/Exe/ZyPURL.cgi?Dockey=P1000A0G.txt>.
- Hanley, JT; Ensor, DS; Smith, DD; Sparks, LE. (1994). Fractional aerosol filtration efficiency of in-duct ventilation air cleaners. *Indoor Air* 4: 169-178.
- He, C; Morawska, L; Gilbert, D. (2005). Particle deposition rates in residential houses. *Atmos Environ* 39: 3891-3899. <http://dx.doi.org/10.1016/j.atmosenv.2005.03.016>.
- Hirvonen, A; Pasanen, P; Tarhanen, J; Ruuskanen, J. (1994). Thermal desorption of organic compounds associated with settled household dust. *Indoor Air* 4: 255-264.
- Howard-Reed, C; Corsi, RL; Moya, J. (1999). Mass Transfer of Volatile Organic Compounds from Drinking Water to Indoor Air: The Role of Residential Dishwashers. *Environ Sci Technol* 33: 2266-2272. <http://dx.doi.org/10.1021/es981354h>.
- Johnson, PC; Ettinger, RA. (1991). Model for subsurface vapor intrusion into buildings. Washington, DC: U.S. Environmental Protection Agency. http://www.epa.gov/oswer/riskassessment/airmodel/johnson_ettinger.htm.
- Koontz, MD; Nagda, NL. (1991). A multichamber model for assessing consumer inhalation exposure. *Indoor Air* 1: 593-605.
- Koontz, MD; Rector, HE. (1995). Estimation of distributions for residential air exchange rates: Final report. Washington, DC: U.S.

Chapter 19—Building Characteristics

- Environmental Protection Agency, Office of Pollution Prevention and Toxics.
- Koontz, MD; Rector, HE; Fortmann, RC; Nagda, NL. (1988). Preliminary experiments in a research house to investigate contaminant migration in indoor air [EPA Report]. (EPA 560/5-88/004). Washington, DC: U.S. Environmental Protection Agency. <http://nepis.epa.gov/Adobe/PDF/P1003BBS.PDF>.
- Layton, DW; Thatcher, TL. (1995). Movement of outdoor particles to the indoor environment: an analysis of the Arnhem lead study.
- Leaderer, BP; Schaap, L; Dietz, RN. (1985). Evaluation of the perfluorocarbon tracer technique for determining infiltration rates in residences. *Environ Sci Technol* 19: 1225-1232. <http://dx.doi.org/10.1021/es00142a015>.
- Liddament, M; Allen, C. (1983). Validation and comparison of mathematical models of air infiltration. (Technical Note AIC 11). Coventry, UK: Air Infiltration and Ventilation Centre.
- Little, JC. (1992). Applying the two-resistance theory to contaminant volatilization in showers. *Environ Sci Technol* 26: 1341-1349.
- Little, JC; Daisey, JM; Nazaroff, WW. (1992). Transport of subsurface contaminants into buildings: An exposure pathway for volatile organics. *Environ Sci Technol* 26: 2058-2066. <http://dx.doi.org/10.1021/es00035a001>.
- Lucas, RM; Grillo, RB; Perez-Michael, A; Kemp, S. (1992). National residential radon survey statistical analysis -- volume 2: Summary of the questionnaire data. (RTI/5158/49-2F). Research Triangle Park, NC: Research Triangle Institute.
- Mage, DT; Ott, WR. (1994). The correction for nonuniform mixing in indoor environments. In *Papers from the ASTM Symposium on Characterizing Indoor Sources and Sink Effects*. Washington, DC: American Society for Testing and Materials.
- McKone, TE. (1987). Human exposure to volatile organic compounds in household tap water: the indoor inhalation pathway. *Environ Sci Technol* 21: 1194-1201.
- Mckone, TE. (1989). Household exposure models. *Toxicol Lett* 49: 321-339.
- Moya, J; Howard-Reed, C; Corsi, RL. (1999). Volatilization of chemicals from tap water to indoor air from contaminated water used for showering. *Environ Sci Technol* 33: 2321-2327.
- Murray, DM. (1997). Residential house and zone volumes in the United States: empirical and estimated parametric distributions. *Risk Anal* 17: 439-446.
- Murray, DM; Burmaster, DE. (1995). Residential air exchange rates in the United States: empirical and estimated parametric distributions by season and climatic region. *Risk Anal* 15: 459-465.
- Nazaroff, WW; Cass, GR. (1986). Mathematical modeling of chemically reactive pollutants in indoor air. *Environ Sci Technol* 20: 924-934.
- Nazaroff, WW; Cass, GR. (1989a). Mass-transport aspects of pollutant removal at indoor surfaces. *Environ Int* 15: 567-584. [http://dx.doi.org/10.1016/0160-4120\(89\)90078-0](http://dx.doi.org/10.1016/0160-4120(89)90078-0).
- Nazaroff, WW; Cass, GR. (1989b). Mathematical modeling of indoor aerosol dynamics. *Environ Sci Technol* 23: 157-166.
- Nazaroff, WW; Doyle, SM; Nero, AV, Jr; Sextro, RG. (1988). Radon entry via potable water. In WW Nazaroff; AV Nero, Jr. (Eds.), *Radon and its decay products in indoor air*. New York, NY: John Wiley & Sons.
- Nazaroff, WW; Gadgil, AJ; Weschler, CJ. (1993). Critique of the use of deposition velocity in modeling indoor air quality.
- Offermann, FJ; Sextro, RG; Fisk, WJ; Nazaroff, WW; Nero, AV; Revzan, KL; Yater, J. (1984). Control of respirable particles and radon progeny with portable air cleaners. Offermann, FJ; Sextro, RG; Fisk, WJ; Nazaroff, WW; Nero, AV; Revzan, KL; Yater, J.
- Palma, T; Vasu, AB; Hetes, RG. (1999). The Total Risk Integrated Methodology (TRIM). EM30-34.
- Persily, A; Linteris, G. (1983). A comparison of measured and predicted infiltration rates. 89.
- Price, PN; Shehabi, A; Chan, R. (2006). Indoor-outdoor air leakage of apartments and commercial buildings. Berkeley, CA: California Energy Commission. <http://www.energy.ca.gov/2006publications/CEC-500-2006-111/CEC-500-2006-111.PDF>.
- Price, S. (2001). An evaluation of the potential for use of existing exposure software (or software currently under development) in a tiered approach to the assessment of

Chapter 19—Building Characteristics

- exposures and risks to children. Washington, DC: American Chemistry Council. <http://www.epa.gov/opptintr/vccep/pubs/revmodlr.pdf>.
- Relwani, SM; Moschandreas, DJ; Billick, IH. (1986). Effects of operational factors on pollutant emission rates from residential gas appliances. *J Air Pollut Control Assoc* 36: 1233-1237.
- Roberts, JW; Budd, WT; Ruby, MG; Bond, AE; Lewis, RG; Wiener, RW; Camann, DE. (1991). Development and field testing of a high volume sampler for pesticides and toxics in dust. *J Expo Sci Environ Epidemiol* 1: 143-155.
- Rosenbaum, AS; Cohen, JP; Kavooosi, F. (2002). Update and refinement of an indoor exposure assessment methodology. (Contract 98-327). Sacramento, CA: California Air Resources Board.
- Ryan, PB. (1991). An overview of human exposure modeling. *J Expo Sci Environ Epidemiol* 1: 453-474.
- Sandberg, M. (1984). The multi-chamber theory reconsidered from the viewpoint of air quality studies. *Build Environ* 19: 221-233. [http://dx.doi.org/10.1016/0360-1323\(84\)90003-9](http://dx.doi.org/10.1016/0360-1323(84)90003-9).
- Sextro, RG. (1994). Radon and the natural environment. In NL Nagda (Ed.), *Radon: Relevance, measurements, health risks, and control* (pp. 9-32). Philadelphia, PA: ASTM. <http://dx.doi.org/10.1520/MNL10140M>.
- Shaughnessy, RJ; Levetin, E; Blocker, J; Sublette, KL. (1994). Effectiveness of portable indoor air cleaners: sensory testing results. *Indoor Air* 4: 179-188.
- Sherman, MH. (1989). Analysis of errors associated with passive ventilation measurement techniques. *Build Environ* 24: 131-139. [http://dx.doi.org/10.1016/0360-1323\(89\)90002-4](http://dx.doi.org/10.1016/0360-1323(89)90002-4).
- Sherman, MH; Matson, NE. (2002). Air tightness of new U.S. houses: A preliminary report. (LBNL-48671). Berkeley, CA: Lawrence Berkeley National Laboratory. <http://energy.lbl.gov/ie/pdf/LBNL-48671.pdf>.
- Sinden, FW. (1978). Multi-chamber theory of air infiltration. *Build Environ* 13: 21-28. [http://dx.doi.org/10.1016/0360-1323\(78\)90005-7](http://dx.doi.org/10.1016/0360-1323(78)90005-7).
- Sparks, LE. (1997). RISK version 1.7: Multiple pollutant IAQ model. Research Triangle Park, NC: U.S. Environmental Protection Agency.
- Thatcher, TL; Lai, ACK; Moreno-Jackson, R; Sextro, RG; Nazaroff, WW. (2002). Effects of room furnishings and air speed on particle deposition rates indoors. *Atmos Environ* 36: 1811-1819. [http://dx.doi.org/10.1016/S1352-2310\(02\)00157-7](http://dx.doi.org/10.1016/S1352-2310(02)00157-7).
- Thatcher, TL; Layton, DW. (1995). Deposition, resuspension, and penetration of particles within a residence. *Atmos Environ* 29: 1487-1497. [http://dx.doi.org/10.1016/1352-2310\(95\)00016-R](http://dx.doi.org/10.1016/1352-2310(95)00016-R).
- Tichenor, BA; Guo, Z; Dunn, JE; Sparks, LE; Mason, MA. (1991). The interaction of vapour phase organic compounds with indoor sinks. *Indoor Air* 1: 23-35.
- Tucker, WG. (1991). Emission of organic substances from indoor surface materials. *Environ Int* 17: 357-363.
- Turk, BH; Brown, JT; Geisling-Sobotka, K; Froehlich, DA; Grimsrud, DT; Harrison, J; Koonce, JF; Prill, RJ; Revzan, KL. (1987). Indoor air quality and ventilation measurements in 38 Pacific Northwest commercial buildings: Volume I: Measurement results and interpretation: Final report. (LBL22315 1/2). Berkeley, CA: Lawrence Berkeley National Laboratory. <http://www.ntis.gov/search/product.aspx?A=BBR=DE88014064>.
- U.S. Census Bureau. (2009). American housing survey for the United States: 2009. Washington, DC: U.S. Government Printing Office. <http://www.census.gov/prod/2011pubs/h150-09.pdf>.
- U.S. EPA (U.S. Environmental Protection Agency). (1987). Methods for assessing exposure to chemical substances: Volume 7: Methods for assessing consumer exposure to chemical substances [EPA Report]. (EPA/560/5-85/007). Washington, DC. <http://nepis.epa.gov/Exe/ZyPURL.cgi?Dockey=P100718Y.txt>.
- U.S. EPA (U.S. Environmental Protection Agency). (1990a). Methods for assessing exposure to chemical substances: Volume 11: Methodology for estimating the migration of additives and impurities from polymeric materials [EPA Report]. (EPA 560/5-85-015). Washington, DC. <http://nepis.epa.gov/Exe/ZyPURL.cgi?Dockey=P100BCMB.txt>.

Chapter 19—Building Characteristics

- U.S. EPA (U.S. Environmental Protection Agency). (1990b). Methods for assessing exposure to chemical substances: Volume 12: Methods for estimating the concentration of chemical substances in indoor air [EPA Report]. (EPA 560/5-85-016). Washington, DC.
- U.S. EPA (U.S. Environmental Protection Agency). (1995). User's guide for the industrial source complex (ISC3) dispersion models. (EPA-454/B-95-003a). Research Triangle Park, NC.
<http://www.epa.gov/scram001/userg/regmod/isc3v1.pdf>.
- U.S. EPA (U.S. Environmental Protection Agency). (2000). Volatilization rates from water to indoor air--Phase II. (EPA/600/R-00/096). Washington, DC.
<http://nepis.epa.gov/Exe/ZyPURL.cgi?Dockey=30002F5O.txt>.
- Versar (Versar Inc.). (1990). Database of perfluorocarbon tracer (PFT) ventilation measurements: Description and user's manual [Database]. Washington, DC: U.S. Environmental Protection Agency.
- Wallace, L. (1996). Indoor particles: a review [Review]. *J Air Waste Manag Assoc* 46: 98-126.
- Walton, GN; Dols, WS. (2010). CONTAM user guide and program documentation. Gaithersburg, MD: National Institute of Standards and Technology.
- Wang, LL; Dols, WS; Chen, Q. (2010). Using CFD Capabilities of CONTAM 3.0 for Simulating Airflow and Contaminant Transport in and around Buildings. *HVACandR Research* 16: 749-763.
- Wilkes, C; Nuckols, JR. (2000). Comparing exposure classification by three alternative methods: Measured blood levels, questionnaire results, and model predictions [abstract]. In 10th annual conference of the International Society of Exposure Analysis : exposure analysis in the 21st century : integrating science, policy & quality of life : October 24 to 27 2000 : abstracts. Boston, MA: International Society of Exposure Analysis.
- Wilkes, CR. (1998). Case studies. In SS Olin (Ed.), *Exposure to contaminants in drinking water: Estimating uptake through the skin and by inhalation*. Boca Raton, FL: CRC Press.
http://www.crcpress.com/product/isbn/9780849328046;jsessionid=8QXzIDzid-e2ijbzWDzsbg**.
- Wilkes, CR; Small, MJ; Andelman, JB; Giardino, NJ; Marshall, J. (1992). Inhalation exposure model for volatile chemicals from indoor uses of water. *Atmos Environ* 26: 2227-2236.
[http://dx.doi.org/10.1016/0960-1686\(92\)90412-E](http://dx.doi.org/10.1016/0960-1686(92)90412-E).
- Wolkoff, P. (1995). Volatile Organic Compounds Sources, Measurements, Emissions, and the Impact on Indoor Air Quality. *Indoor Air* 5: 5-73.
<http://dx.doi.org/10.1111/j.1600-0668.1995.tb00017.x>.
- Wolkoff, P; Wilkins, CK. (1994). Indoor VOCs from household floor dust: comparison of headspace with desorbed VOCs; method for VOC release determination. *Indoor Air* 4: 248-254.
- Yamamoto, N; Shendell, D; Winer, A; Zhang, J. (2010). Residential air exchange rates in three major US metropolitan areas: results from the Relationship Among Indoor, Outdoor, and Personal Air Study 1999–2001. *Indoor Air* 20: 85-90.
<http://dx.doi.org/10.1111/j.1600-0668.2009.00622.x>.
- Zinn, TW; Cline, D; Lehmann, WF. (1990). Long-term study of formaldehyde emission decay from particleboard. *For Prod J* 40: 15-18.

Housing Type	Ownership					
	Owner-Occupied		Rental ^a		All Units	
	Volume ^b (m ³)	% of Total	Volume ^b (m ³)	% of Total	Volume ^b (m ³)	% of Total
Single-Family (Detached)	637	57.7	449	7.2	616	64.9
Single-Family (Attached)	544	3.8	313	3.1	440	6.8
Multifamily (2–4 units)	363	1.7	211	5.3	247	7.0
Multifamily (5+ Units)	253	2.1	189	13.0	197	15.1
Mobile Home	249	5.2	196	1.1	240	6.3
All Types	586	70.5	269	29.7	492	100
^a The classification "Occupied without payment of rent" is included in the estimates for rentals. ^b Volumes calculated from floor areas assuming a ceiling height of 8 feet. Excludes floor space in unheated garages.						

Source: U.S. EPA Analysis of U.S. DOE (2008a).

Year of Construction	Volume ^a (m ³)	% of Total
Before 1940	527	13.2
1940–1949	464	6.7
1950–1959	465	11.3
1960–1969	446	11.2
1970–1979	422	17.0
1980–1989	451	16.7
1990–1999	567	15.6
2000–2005	640	8.3
All Years	492	100
^a Volumes calculated from floor areas assuming a ceiling height of 8 feet. Excludes floor space in unheated garages.		

Source: U.S. EPA Analysis of U.S. DOE (2008a).

Chapter 19—Building Characteristics

Table 19-8. Summary of Residential Volume Distributions Based on U.S. DOE (2008a)^a (m³)

Parameter	Volume
Arithmetic Mean	492
Standard Deviation	349
10 th Percentile	154
25 th Percentile	231
50 th Percentile	395
75 th Percentile	648
90 th Percentile	971

^a All housing types, all units.

Source: U.S. EPA's Analysis of U.S. DOE (2008a).

Table 19-9. Summary of Residential Volume Distributions Based on Versar (1990) (m³)

Parameter	Volume
Arithmetic Mean	369
Standard Deviation	209
10 th Percentile	167
25 th Percentile	225
50 th Percentile	321
75 th Percentile	473
90 th Percentile	575

Source: Versar (1990); based on PFT database.

Chapter 19—Building Characteristics

Housing Units	Total Housing Units	Seasonal	Year-Round				New units in last 4 years	Manuf./mobile homes
			Total	Occupied		Vacant Total Vacant		
				Owner	Renter			
Total all housing units	130,112	4,618	125,494	76,428	35,378	13,688	5,955	8,769
Single detached and manufactured/mobile homes	91,241	3,524	87,717	68,742	11,176	7,799	4,291	8,769
Volume (m ³)								
Less than 113.3	988	225	764	383	220	161	10	331
113.3–169.7	2,765	462	2,303	1,085	686	532	19	1,020
169.9–226.3	6,440	593	5,847	3,519	1,495	833	68	1,935
226.5–339.6	21,224	814	20,410	14,978	3,441	1,991	557	2,779
339.8–452.8	20,636	521	20,115	16,284	2,235	1,596	827	1,309
453.1–566.1	14,361	284	14,077	12,057	1,134	886	813	334
566.3–679.4	7,589	141	7,448	6,622	429	398	535	126
679.6–905.9	7,252	137	7,115	6,391	301	424	751	54
906 or more	4,456	113	4,343	3,787	243	313	469	146
Not reported/Don't know	5,529	234	5,295	3,638	992	666	241	735
Median Volume (m ³)	385.1	260.5	393.3	407.8	294.5	339.8	521.0	247.4

^a Converted from ft². Assumes 8-foot ceiling.

Source: U.S. Census Bureau (2009).

Nominal Dimensions	Length (meters)	Width (meters)	Height (meters)	Volume (m ³)	Wall Area (m ²)	Floor Area (m ²)	Total Area (m ²)
8-Foot Ceiling							
12' × 15'	4.6	3.7	2.4	41	40	17	74
12' × 12'	3.7	3.7	2.4	33	36	13	62
10' × 12'	3.0	3.7	2.4	27	33	11	55
9' × 12'	2.7	3.7	2.4	24	31	10	51
6' × 12'	1.8	3.7	2.4	16	27	7	40
4' × 12'	1.2	3.7	2.4	11	24	4	32
12-Foot Ceiling							
12' × 15'	4.6	3.7	3.7	61	60	17	94
12' × 12'	3.7	3.7	3.7	49	54	13	80
10' × 12'	3.0	3.7	3.7	41	49	11	71
9' × 12'	2.7	3.7	3.7	37	47	10	67
6' × 12'	1.8	3.7	3.7	24	40	7	54
4' × 12'	1.2	3.7	3.7	16	36	4	44

Chapter 19—Building Characteristics

Table 19-12. Examples of Products and Materials Associated With Floor and Wall Surfaces in Residences

Material Sources	Assumed Amount of Surface Covered ^a (m ²)
Silicone caulk	0.2
Floor adhesive	10.0
Floor wax	50.0
Wood stain	10.0
Polyurethane wood finish	10.0
Floor varnish or lacquer	50.0
Plywood paneling	100.0
Chipboard	100.0
Gypsum board	100.0
Wallpaper	100.0

^a Based on typical values for a residence.

Source: Adapted from Tucker (1991).

Table 19-13. Residential Heating Characteristics by U.S. Census Region

Space Heating Characteristics	Housing Units (%)	U.S. Census Region			
		Northeast	Midwest	South	West
Total	100.0	100.0	100.0	100.0	100.0
Do Not Have Space Heating Equipment	1.1	Q	Q	Q	2.9
Have Main Space Heating Equipment	98.8	99.5	100.0	99.0	96.7
Main Heating Fuel and Equipment					
Natural Gas	52.4	55.3	71.9	33.4	60.7
Central Warm-Air Furnace	40.2	29.6	63.3	27.0	47.1
Steam or Hot Water System	7.4	23.8	6.3	2.5	2.5
Floor, Wall or Pipeless Furnace	2.1	Q	1.2	0.5	6.6
Room Heater	1.8	Q	Q	2.2	3.3
Other Equipment	0.8	1.0	Q	1.0	1.2
Electricity	30.3	7.8	13.7	54.3	26.9
Built-in Electric Units	4.5	4.4	4.3	3.7	6.6
Central Warm-Air Furnace	14.4	1.5	5.5	27.0	14.0
Heat Pump	8.3	Q	3.1	17.7	4.1
Portable Electric Heater	1.4	Q	Q	2.2	2.1
Other Equipment	1.7	1.0	Q	3.4	Q
Fuel Oil	6.9	30.1	2.7	1.2	1.2
Steam or Hot Water System	4.2	20.9	Q	Q	Q
Central Warm-Air Furnace	2.5	8.7	2.0	0.7	Q
Other Equipment	0.3	Q	Q	Q	Q
Wood	2.6	2.4	2.7	2.2	3.3
Propane/LPG ^a	5.4	1.9	7.4	6.6	4.1
Central Warm-Air Furnace	3.7	1.0	6.6	3.7	2.5
Room Heater	0.8	Q	Q	1.7	Q
Other Equipment	0.9	Q	Q	1.0	1.2
Kerosene	0.6	1.0	Q	1.0	Q
Other Fuel	0.5	Q	Q	Q	Q
Secondary Heating Fuel and Equipment					
No	68.6	78.6	63.3	71.0	61.6
Yes (More than One May Apply)	31.4	21.4	36.7	29.0	38.4
Natural Gas	4.5	1.9	5.9	3.2	7.4
Fireplace	2.4	Q	3.1	1.5	4.5
Room Heater	0.5	Q	Q	0.7	Q
Central Warm-Air Furnace	1.0	Q	1.6	Q	1.7
Other Equipment	0.7	Q	Q	Q	1.2
Electricity	17.7	12.1	20.7	17.0	21.1
Portable Heater	14.4	9.7	16.8	13.8	16.9
Built-in Electric Units	2.0	1.9	2.3	1.0	2.9
Heat Pump	0.5	N/R	Q	1.0	Q
Other Equipment	1.2	Q	1.6	1.5	1.7
Fuel Oil	0.4	1.0	Q	Q	N/R
Wood	8.0	4.4	8.6	7.6	11.2
Propane/LPG	2.1	1.5	2.7	2.7	N/R
Kerosene	0.8	1.0	1.2	1.0	N/R
Other Fuel	0.2	Q	Q	Q	Q
^a Liquefied Petroleum Gas.					
Q = Data withheld either because the Relative Standard Error (RSE) was greater than 50% or fewer than 10 households were sampled.					
N/R = No cases in reporting sample.					
Source: U.S. DOE (2008a).					

Table 19-14. Residential Heating Characteristics by Urban/Rural Location

Space Heating Characteristics	Housing Units (%)	Urban/Rural Location			
		City	Town	Suburbs	Rural
Total	100.0	100.0	100.0	100.0	100.0
Do Not Have Space Heating Equipment	1.1	1.5	Q	0.9	Q
Have Main Space Heating Equipment	98.8	98.3	99.5	99.1	99.1
Main Heating Fuel and Equipment					
Natural Gas	52.4	57.3	62.6	65.6	19.3
Central Warm-Air Furnace	40.2	42.0	45.3	56.4	16.1
Steam or Hot Water System	7.4	9.3	11.1	6.2	1.3
Floor, Wall or Pipeless Furnace	2.1	2.5	2.6	1.8	Q
Room Heater	1.8	2.3	2.6	Q	Q
Other Equipment	0.8	0.8	1.6	Q	Q
Electricity	30.3	33.8	24.2	25.6	33.2
Built-in Electric Units	4.5	5.3	4.2	4.0	4.0
Central Warm-Air Furnace	14.4	16.8	14.2	10.1	14.3
Heat Pump	8.3	7.2	4.2	9.7	12.1
Portable Electric Heater	1.4	1.7	Q	Q	2.2
Other Equipment	1.7	2.5	Q	Q	Q
Fuel Oil	6.9	5.1	8.9	5.3	10.8
Steam or Hot Water System	4.2	3.8	4.7	3.5	5.4
Central Warm-Air Furnace	2.5	1.3	3.7	2.2	4.5
Other Equipment	0.3	Q	Q	N/R	Q
Wood	2.6	0.6	Q	Q	10.3
Heating Stove	1.8	Q	Q	Q	6.7
Other Equipment	0.8	Q	Q	N/R	3.1
Propane/LPG ^a	5.4	0.6	1.1	1.3	23.3
Central Warm-Air Furnace	3.7	Q	Q	Q	16.6
Room Heater	0.8	Q	Q	Q	3.1
Other Equipment	0.9	Q	Q	Q	3.6
Kerosene	0.6	Q	Q	Q	1.8
Other Fuel	0.5	0.6	Q	Q	Q
Secondary Heating Fuel and Equipment					
No	68.6	75.2	73.2	67.4	52.0
Yes (More than One May Apply)	31.4	24.8	26.8	32.2	48.4
Natural Gas	4.5	3.8	3.7	7.5	3.1
Fireplace	2.4	1.9	1.6	4.8	1.8
Room Heater	0.5	Q	Q	Q	Q
Central Warm-Air Furnace	1.0	0.8	Q	1.3	Q
Other Equipment	0.7	0.8	Q	Q	Q
Electricity	17.7	15.9	15.8	17.6	23.3
Portable Heater	14.4	13.2	13.7	14.5	17.0
Built-in Electric Units	2.0	1.7	Q	2.2	3.1
Heat Pump	0.5	Q	Q	Q	1.3
Other Equipment	1.2	0.8	1.1	Q	2.2
Fuel Oil	0.4	N/R	Q	Q	Q
Wood	8.0	5.5	6.3	7.0	15.2
Propane/LPG	2.1	Q	Q	1.3	8.1
Kerosene	0.8	Q	Q	Q	2.2
Other Fuel	0.2	Q	Q	Q	Q
^a Liquefied Petroleum Gas.					
Q = Data withheld either because Relative Standard Error (RSE) was >50% or <10 households were sampled.					
N/R = No cases in reporting sample.					
Source: U.S. DOE (2008a).					

Table 19-15. Residential Air Conditioning Characteristics by U.S. Census Region

Air Conditioning Characteristics	Housing Units (%)	U.S. Census Region			
		Northeast	Midwest	South	West
Total	100.0	100.0	100.0	100.0	100.0
Do Not Have Cooling Equipment	16.0	19.4	8.2	3.4	42.6
Have Cooling Equipment	84.0	80.1	91.8	96.6	57.4
Air-Conditioning Equipment ^{a, b}					
Central System	59.3	29.1	67.6	78.9	43.4
Window/Wall Units	26.0	51.9	25.8	19.7	14.9
Frequency of Central Air-Conditioner Use					
Never	1.3	Q	Q	1.0	3.3
Only a Few Times When Needed	10.3	7.8	15.2	6.1	14.0
Quite a Bit	11.3	5.8	17.6	11.1	9.9
All Summer	36.5	14.6	34.4	60.9	16.1
Frequency Most-Used Unit Used					
Never	0.5	Q	Q	Q	Q
Only a Few Times When Needed	10.9	23.8	12.1	5.2	8.3
Quite a Bit	6.8	14.6	6.3	5.4	2.9
All Summer	7.7	12.6	7.0	8.8	2.9
^a	In the 2005 RECS, 1.5 million housing units reported having both central and window/wall air conditioners.				
^b	The number of housing units using air-conditioning includes a small, undetermined number of housing units where the fuel for central air-conditioning was other than electricity; these housing units were treated as if the air-conditioning fuel was electricity.				
Q	= Data withheld either because the Relative Standard Error (RSE) was greater than 50% or fewer than 10 households were sampled.				
Source: U.S. DOE (2008a).					

Table 19-16. Percent of Residences With Basement, by Census Region and U.S. EPA Region

Census Region	U.S. EPA Regions	% of Residences With Basements
Northeast	1	93.4
Northeast	2	55.9
Midwest	3	67.9
Midwest	4	19.3
South	5	73.5
South	6	4.1
South	7	75.3
West	8	68.5
West	9	10.3
West	10	11.5
	All Regions	45.2
Source: Lucas et al. (1992).		

Table 19-17. Percent of Residences With Basement, by Census Region

Census Region	Census Divisions	% of Residences With Basements
Northeast	1 New England	83.2
Northeast	2 Mid Atlantic	69.1
Midwest	3 East North Central	68.7
Midwest	4 West North Central	65.3
South	5 South Atlantic	27.0
South	6 East South Central	23.7
South	7 West South Central	2.8
West	8 Mountain	29.9
West	9 Pacific	10.9
	All Divisions	40.6

Source: U.S. EPA Analysis of U.S. DOE (2008a).

Chapter 19—Building Characteristics

Table 19-18. States Associated With U.S. EPA Regions and Census Regions

U.S. EPA Regions			
<u>Region 1</u>	<u>Region 4</u>	<u>Region 6</u>	<u>Region 8</u>
Connecticut	Alabama	Arkansas	Colorado
Maine	Florida	Louisiana	Montana
Massachusetts	Georgia	New Mexico	North Dakota
New Hampshire	Kentucky	Oklahoma	South Dakota
Rhode Island	Mississippi	Texas	Utah
Vermont	North Carolina		Wyoming
	South Carolina	<u>Region 7</u>	
<u>Region 2</u>	Tennessee	Iowa	<u>Region 9</u>
New Jersey		Kansas	Arizona
New York	<u>Region 5</u>	Missouri	California
	Illinois	Nebraska	Hawaii
<u>Region 3</u>	Indiana		Nevada
Delaware	Michigan		
District of Columbia	Minnesota		<u>Region 10</u>
Maryland	Ohio		Alaska
Pennsylvania	Wisconsin		Idaho
Virginia			Oregon
West Virginia			Washington
U.S. Census Bureau Regions			
<u>Northeast Region</u>	<u>Midwest Region</u>	<u>South Region</u>	<u>West Region</u>
Connecticut	Illinois	Alabama	Alaska
Maine	Indiana	Arkansas	Arizona
Massachusetts	Iowa	Delaware	California
New Hampshire	Kansas	District of Columbia	Colorado
New Jersey	Michigan	Florida	Hawaii
New York	Minnesota	Georgia	Idaho
Pennsylvania	Missouri	Kentucky	Montana
Rhode island	Nebraska	Louisiana	Nevada
Vermont	North Dakota	Maryland	New Mexico
	Ohio	Mississippi	Oregon
	South Dakota	North Carolina	Utah
	Wisconsin	Oklahoma	Washington
		South Carolina	Wyoming
		Tennessee	
		Texas	
		Virginia	
		West Virginia	

Source: U.S. DOE (2008a).

Table 19-19. Percent of Residences With Certain Foundation Types by Census Region

Census Region	% of Residences ^a		
	With Basement	With Crawlspace	With Concrete Slab
Northeast	72.9	18.9	24.5
Midwest	67.7	27.4	30.2
South	19.1	29.7	58.5
West	17.0	36.9	61.8
All Regions	40.6	28.7	46.0

^a Percentage may add to more than 100 because more than one foundation type may apply to a given residence.

Source: U.S. EPA Analysis of U.S. DOE (2008a).

Primary Building Activity	N	Mean	SE of Mean	Percentiles					% of Total
				10 th	25 th	50 th	75 th	90 th	
Vacant	134	4,789	581	408	612	1,257	3,823	11,213	3.7
Office	976	5,036	397	510	714	1,359	3,398	8,155	17.0
Laboratory	43	24,681	1,114	2,039	5,437	10,534	40,776	61,164	0.2
Non-refrigerated warehouse	473	9,298	992	1,019	1,812	2,945	7,504	16,990	12.0
Food sales	125	1,889	106	476	680	951	2,039	3,398	4.6
Public order and safety	85	5,253	482	816	1,019	1,699	3,398	8,495	1.5
Outpatient healthcare	144	3,537	251	680	1,019	2,039	3,398	6,966	2.5
Refrigerated warehouse	20	19,716	3,377	1,133	1,699	3,398	8,212	38,511	0.3
Religious worship	311	3,443	186	612	917	2,039	4,163	8,325	7.6
Public assembly	279	4,839	394	595	1,019	2,277	4,417	7,136	5.7
Education	649	8,694	513	527	867	2,379	10,194	23,786	7.9
Food service	242	1,889	112	442	680	1,189	2,039	3,568	6.1
Inpatient healthcare	217	82,034	5,541	17,330	25,485	36,019	95,145	203,881	0.2
Nursing	73	15,522	559	1,546	5,097	10,534	17,330	38,737	0.4
Lodging	260	11,559	1,257	527	1,376	4,078	10,194	27,184	2.5
Strip shopping mall	349	7,891	610	1,359	2,277	4,078	6,966	19,709	4.3
Enclosed mall	46	287,978	14,780	35,679	35,679	113,268	453,070	849,505	0.1
Retail other than mall	355	3,310	218	510	680	1,631	3,398	6,116	9.1
Service	370	2,213	182	459	629	934	2,039	4,587	12.8
Other	64	5,236	984	425	544	1,427	3,398	9,175	1.4
All Buildings ^b	5,215	5,575	256	527	816	1,699	4,248	10,194	100

^a Volumes calculated from floor areas assuming a ceiling height of 12 feet for other structures and 20 feet for warehouses.

^b Weighted average calculated from floor areas assuming a ceiling height of 12 feet for all buildings except warehouses and enclosed malls, which assumed 20-foot ceilings.

N = Number of observations.
SE = Standard error.

Source: U.S. EPA Analysis of U.S. DOE (2008b).

Table 19-21. Non-Residential Buildings: Hours per Week Open and Number of Employees

Primary Building Activity	N	%	Number of Hours/Week Open							Number of Employees During Main Shift						
			Mean	SE of Mean	Percentiles					Mean	SE of Mean	Percentiles				
					10 th	25 th	50 th	75 th	90 th			10 th	25 th	50 th	75 th	90 th
Vacant	134	2.8%	6.7	1.2	0	0	0	0	40	0.35	0.08	0	0	0	0	0
Office	976	20.2%	54.7	1.6	40	45	54	65	168	34.2	2.8	4	11	57	300	886
Laboratory	43	0.9%	103.5	0.8	50	58	98	168	168	105.6	4.5	20	55	156	300	435
Non-refrigerated warehouse	473	9.8%	66.2	4.8	20	40	55	80	168	7.0	0.9	0	1	8	25	64
Food sales	125	2.6%	107.3	2.5	60	80	109	127	168	6.3	0.5	1	2	4	15	50
Public order and safety	85	1.8%	103.0	7.6	10	40	168	168	168	19.1	2.2	1	4	15	60	200
Outpatient healthcare	144	3.0%	52.0	2.8	40	45	54	70	168	21.5	1.9	5	8	40	125	200
Refrigerated warehouse	20	0.4%	61.3	0.7	44	53	102	126	168	18.2	2.4	4	8	38	61	165
Religious worship	311	6.5%	32.0	2.4	5	13	40	60	79	4.6	0.5	1	1	3	10	19
Public assembly	279	5.8%	50.3	3.8	12	40	63	96	125	8.7	1.5	0	2	5	22	80
Education	649	13.5%	49.6	1.0	38	42	54	70	85	32.4	8.8	3	14	38	75	133
Food service	242	5.0%	85.8	2.6	40	66	84	105	130	10.5	0.9	2	4	8	15	33
Inpatient healthcare	217	4.5%	168.0	*	168	168	168	168	168	471.0	40.4	175	315	785	1,300	2,250
Nursing	73	1.5%	168.0	*	168	168	168	168	168	44.8	2.5	15	25	50	80	170
Lodging	260	5.4%	166.6	0.8	168	168	168	168	168	12.3	2.0	1	3	10	25	80
Retail other than mall	355	7.4%	59.1	1.5	42	50	62	80	105	7.8	0.7	2	3	6	22	72
Service	370	7.7%	55.0	2.1	40	40	50	68	105	5.9	0.6	1	2	4	10	35
Other	64	1.3%	57.8	7.1	12	40	51	90	168	12.3	1.7	1	2	10	44	150
All Activities	4,820	100.0%	61.2	1.2	30	45	60	98	168	15.7	1.2	1	3	14	66	300

* All sampled inpatient healthcare and nursing buildings reported being open 24 hours a day, 7 days a week.
N = Number of observations.
SE = Standard error.

Source: U.S. EPA Analysis of U.S. DOE (2008b).

Table 19-22. Non-Residential Heating Energy Sources for Non-Mall Buildings

	All Buildings ^a	Buildings With Space Heating	Space-Heating Energy Sources Used ^b					
			Electricity	Natural Gas	Fuel Oil	District Heat	Propane	Other ^c
All Buildings ^a	4,645	3,982	1,766	2,165	360	65	372	113
Building Floorspace (ft ²)								
1,001–5,000	54.9%	52.7%	50.3%	46.8%	54.4%	Q	65.3%	63.7%
5,001–10,000	19.1%	19.6%	19.8%	20.8%	23.9%	Q	19.4%	Q
10,001–25,000	15.9%	16.5%	17.6%	18.9%	12.8%	27.7%	10.2%	Q
25,001–50,000	5.2%	5.7%	6.5%	7.0%	3.1%	13.8%	3.0%	Q
50,001–100,000	2.8%	3.1%	3.4%	3.9%	2.2%	12.3%	Q	Q
100,001–200,000	1.4%	1.6%	1.6%	1.8%	2.5%	13.8%	Q	Q
200,001–500,000	0.5%	0.6%	0.6%	0.7%	1.1%	6.2%	Q	Q
Over 500,000	0.2%	0.2%	0.2%	0.2%	0.3%	3.1%	Q	Q
Principal Building Activity								
Education	8.3%	9.6%	10.2%	8.6%	5.8%	38.5%	9.7%	Q
Food Sales	4.9%	4.7%	5.5%	3.6%	Q	N/R	Q	Q
Food Service	6.4%	7.1%	7.1%	7.9%	Q	Q	8.3%	Q
Health Care	2.8%	3.1%	3.5%	3.1%	Q	3.1%	Q	Q
Lodging	3.1%	3.6%	5.8%	2.6%	4.4%	Q	Q	Q
Retail (Other Than Mall)	9.5%	10.2%	9.6%	10.9%	9.7%	Q	10.8%	Q
Office	17.7%	20.1%	21.5%	21.5%	12.8%	24.6%	9.7%	Q
Public Assembly	6.0%	6.5%	4.7%	6.5%	10.3%	9.2%	Q	Q
Public Order and Safety	1.5%	1.8%	1.4%	1.4%	Q	Q	Q	Q
Religious Worship	8.0%	9.0%	8.6%	9.6%	10.0%	Q	11.8%	N/R
Service	13.4%	12.9%	10.2%	12.3%	22.8%	Q	20.2%	60.2%
Warehouse and Storage	12.9%	7.9%	8.5%	8.2%	7.8%	Q	6.5%	Q
Other	1.7%	1.7%	1.8%	1.9%	Q	Q	Q	Q
Vacant	3.9%	1.7%	1.5%	1.8%	Q	Q	Q	Q
Year Constructed								
Before 1920	7.1%	7.6%	3.7%	8.5%	20.0%	Q	Q	Q
1920–1945	11.3%	11.1%	8.0%	14.3%	13.3%	18.5%	Q	Q
1946–1959	12.1%	12.4%	11.0%	12.9%	18.1%	20.0%	11.0%	Q
1960–1969	12.5%	13.2%	12.0%	13.0%	13.6%	20.0%	11.6%	Q
1970–1979	15.7%	16.3%	16.6%	16.6%	12.8%	9.2%	12.9%	39.8%
1980–1989	15.2%	15.5%	19.9%	12.5%	10.0%	6.2%	19.9%	Q
1990–1999	18.9%	18.1%	21.5%	17.2%	9.4%	12.3%	19.4%	Q
2000–2003	7.2%	5.9%	7.1%	4.9%	Q	Q	12.6%	Q
Census Region and Division								
Northeast	15.6%	16.9%	10.1%	16.0%	63.6%	26.2%	6.5%	Q
Midwest	27.3%	27.9%	20.2%	35.8%	16.4%	20.0%	38.7%	31.9%
South	38.2%	36.7%	50.0%	29.1%	14.2%	30.8%	36.6%	Q
West	18.9%	18.5%	19.7%	19.1%	6.1%	23.1%	18.0%	Q
Heating Equipment ^b								
Heat Pumps	10.2%	12.0%	26.4%	5.7%	1.7%	3.1%	7.5%	Q
Furnaces	40.1%	46.8%	31.4%	58.8%	52.2%	Q	57.0%	57.5%
Individual Space Heaters	17.6%	20.6%	34.2%	18.4%	21.9%	6.2%	32.8%	35.4%
District Heat	1.4%	1.6%	0.3%	0.2%	Q	100.0%	Q	N/R
Boilers	12.5%	14.5%	9.1%	18.3%	40.0%	Q	8.1%	15.9%
Packaged Heating Units	20.5%	23.9%	32.4%	24.4%	4.7%	4.6%	21.2%	Q

Table 19-22. Non-Residential Heating Energy Sources for Non-Mall Buildings (continued)								
	All Buildings ^a	Buildings With Space Heating	Space-Heating Energy Sources Used ^b					
			Electricity	Natural Gas	Fuel Oil	District Heat	Propane	Other ^c
Other	4.4%	5.1%	6.6%	3.7%	10.0%	Q	10.8%	41.6%
^a	Figures in this table do not include enclosed malls and strip malls.							
^b	More than one may apply.							
^c	"Other" includes wood, coal, solar, and all other energy sources.							
Q	= Data withheld because the Relative Standard Error (RSE) was >50%, or <20 buildings were sampled.							
N/R	= No responding cases in sample.							
Source: U.S. DOE (2008b).								

Table 19-23. Non-Residential Air Conditioning Energy Sources for Non-Mall Buildings

	All Buildings ^a	Buildings With Cooling	Cooling Energy Sources ^b		
			Electricity	Natural Gas	District Chilled Water
All Buildings ^a	4,645	3,625	3,589	17	33
Building Floorspace (ft²)					
1,001–5,000	54.9%	50.8%	51.2%	Q	Q
5,001–10,000	19.1%	20.2%	20.3%	Q	Q
10,001–25,000	15.9%	17.4%	17.2%	Q	Q
25,001–50,000	5.2%	6.0%	5.9%	Q	18.2%
50,001–100,000	2.8%	3.3%	3.2%	Q	15.2%
100,001–200,000	1.4%	1.7%	1.5%	Q	18.2%
200,001–500,000	0.5%	0.6%	0.6%	Q	6.1%
Over 500,000	0.2%	0.2%	0.1%	Q	3.0%
Principal Building Activity					
Education	8.3%	9.7%	9.4%	Q	42.4%
Food Sales	4.9%	5.8%	5.8%	N/R	N/R
Food Service	6.4%	7.8%	7.9%	Q	Q
Health Care	2.8%	3.6%	3.6%	0.0%	3.0%
Lodging	3.1%	3.6%	3.6%	Q	Q
Retail (Other Than Mall)	9.5%	11.2%	11.3%	Q	Q
Office	17.7%	21.8%	21.8%	Q	27.3%
Public Assembly	6.0%	5.9%	5.9%	Q	9.1%
Public Order and Safety	1.5%	1.7%	1.7%	Q	Q
Religious Worship	8.0%	8.5%	8.6%	Q	Q
Service	13.4%	10.2%	10.3%	Q	N/R
Warehouse and Storage	12.9%	7.3%	7.3%	Q	Q
Other	1.7%	1.6%	1.6%	Q	Q
Vacant	3.9%	1.4%	1.4%	N/R	Q
Year Constructed					
Before 1920	7.1%	6.4%	6.4%	Q	Q
1920–1945	11.3%	10.5%	10.6%	Q	Q
1946–1959	12.1%	11.9%	11.9%	Q	12.1%
1960–1969	12.5%	12.9%	12.8%	Q	12.1%
1970–1979	15.7%	16.8%	16.9%	Q	15.2%
1980–1989	15.2%	15.9%	15.9%	Q	15.2%
1990–1999	18.9%	19.2%	19.1%	Q	24.2%
2000–2003	7.2%	6.5%	6.5%	Q	Q
Census Region and Division					
Northeast	15.6%	14.3%	14.3%	41.2%	18.2%
Midwest	27.3%	26.4%	26.5%	Q	12.1%
South	38.2%	40.8%	40.9%	Q	42.4%
West	18.9%	18.5%	18.4%	Q	27.3%
Cooling Equipment^b					
Central Air Conditioners	21.7%	27.8%	28.0%	Q	Q
Heat Pumps	10.6%	13.6%	13.7%	47.1%	3.0%
Individual Air Conditioners	16.0%	20.5%	20.7%	Q	6.1%
District Chilled Water	0.7%	0.9%	0.3%	Q	100.0%
Central Chillers	2.4%	3.1%	3.0%	29.4%	Q
Packaged A/C Units	34.7%	44.5%	44.9%	23.5%	12.1%
Swamp Coolers	2.6%	3.4%	3.4%	Q	Q
Other	0.9%	1.1%	0.8%	Q	Q
^a	Figures in this table do not include enclosed malls and strip malls.				
^b	More than one may apply.				
Q	= Data withheld because the Relative Standard Error (RSE) was >50%, or <20 buildings were sampled.				
N/R	= No responding cases in sample.				
Source: U.S. DOE (2008b).					

	West Region	Midwest Region	Northeast Region	South Region	All Regions
Arithmetic Mean	0.66	0.57	0.71	0.61	0.63
Arithmetic Standard Deviation	0.87	0.63	0.60	0.51	0.65
Geometric Mean	0.47	0.39	0.54	0.46	0.46
Geometric Standard Deviation	2.11	2.36	2.14	2.28	2.25
10 th Percentile	0.20	0.16	0.23	0.16	0.18
50 th Percentile	0.43	0.35	0.49	0.49	0.45
90 th Percentile	1.25	1.49	1.33	1.21	1.26
Maximum	23.32	4.52	5.49	3.44	23.32

^aACH = Air changes per hour.

Source: Koontz and Rector (1995).

Table 19-25. Summary of Major Projects Providing Air Exchange Measurements in the PFT Database

Project Code	State	Month(s) ^a	Number of Measurements	Mean Air Exchange Rate (ACH)	SD ^b	Percentiles				
						10 th	25 th	50 th	75 th	90 th
ADM	CA	5-7	29	0.70	0.52	0.29	0.36	0.48	0.81	1.75
BSG	CA	1, 8-12	40	0.53	0.30	0.21	0.30	0.40	0.70	0.90
GSS	AZ	1-3, 8-9	25	0.39	0.21	0.16	0.23	0.33	0.49	0.77
FLEMING	NY	1-6, 8-12	56	0.24	0.28	0.05	0.12	0.22	0.29	0.37
GEOMET1	FL	1,6-8, 10-12	18	0.31	0.16	0.15	0.18	0.25	0.48	0.60
GEOMET2	MD	1-6	23	0.59	0.34	0.12	0.29	0.65	0.83	0.92
GEOMET3	TX	1-3	42	0.87	0.59	0.33	0.51	0.71	1.09	1.58
LAMBERT1	ID	2-3, 10-11	36	0.25	0.13	0.10	0.17	0.23	0.33	0.49
LAMBERT2	MT	1-3, 11	51	0.23	0.15	0.10	0.14	0.19	0.26	0.38
LAMBERT3	OR	1-3, 10-12	83	0.46	0.40	0.19	0.26	0.38	0.56	0.80
LAMBERT4	WA	1-3, 10-12	114	0.30	0.15	0.14	0.20	0.30	0.39	0.50
LBL1	OR	1-4, 10-12	126	0.56	0.37	0.28	0.35	0.45	0.60	1.02
LBL2	WA	1-4, 10-12	71	0.36	0.19	0.18	0.25	0.32	0.42	0.52
LBL3	ID	1-5, 11-12	23	1.03	0.47	0.37	0.73	0.99	1.34	1.76
LBL4	WA	1-4, 11-12	29	0.39	0.27	0.14	0.18	0.36	0.47	0.63
LBL5	WA	2-4	21	0.36	0.21	0.13	0.19	0.30	0.47	0.62
LBL6	ID	3-4	19	0.28	0.14	0.11	0.17	0.26	0.38	0.55
NAHB	MN	1-5, 9-12	28	0.22	0.11	0.11	0.16	0.20	0.24	0.38
NYSDH	NY	1-2, 4, 12	74	0.59	0.37	0.28	0.37	0.50	0.68	1.07
PEI	MD	3-4	140	0.59	0.45	0.15	0.26	0.49	0.83	1.20
PIERCE	CT	1-3	25	0.80	1.14	0.20	0.22	0.38	0.77	2.35
RTI1	CA	2	45	0.90	0.73	0.38	0.48	0.78	1.08	1.52
RTI2	CA	7	41	2.77	2.12	0.79	1.18	2.31	3.59	5.89
RTI3	NY	1-4	397	0.55	0.37	0.26	0.33	0.44	0.63	0.94
SOCAL1	CA	3	551	0.81	0.66	0.29	0.44	0.66	0.94	1.43
SOCAL2	CA	7	408	1.51	1.48	0.35	0.59	1.08	1.90	3.11
SOCAL3	CA	1	330	0.76	1.76	0.26	0.37	0.48	0.75	1.11
UMINN	MN	1-4	35	0.36	0.32	0.17	0.20	0.28	0.40	0.56
UWISC	WI	2-5	57	0.82	0.76	0.22	0.33	0.55	1.04	1.87

^a 1 = January, 2 = February, etc.
^b SD = Standard deviation.

Source: Adapted from Versar (1990).

Chapter 19—Building Characteristics

Climate Region ^b	Season	Sample Size	Arithmetic Mean	Standard Deviation	Percentiles				
					10 th	25 th	50 th	75 th	90 th
Coldest	Winter	161	0.36	0.28	0.11	0.18	0.27	0.48	0.71
	Spring	254	0.44	0.31	0.18	0.24	0.36	0.53	0.80
	Summer	5	0.82	0.69	0.27	0.41	0.57	1.08	2.01
	Fall	47	0.25	0.12	0.10	0.15	0.22	0.34	0.42
Colder	Winter	428	0.57	0.43	0.21	0.30	0.42	0.69	1.18
	Spring	43	0.52	0.91	0.13	0.21	0.24	0.39	0.83
	Summer	2	1.31	-	-	-	-	-	-
	Fall	23	0.35	0.18	0.15	0.22	0.33	0.41	0.59
Warmer	Winter	96	0.47	0.40	0.19	0.26	0.39	0.58	0.78
	Spring	165	0.59	0.43	0.18	0.28	0.48	0.82	1.11
	Summer	34	0.68	0.50	0.27	0.36	0.51	0.83	1.30
	Fall	37	0.51	0.25	0.30	0.30	0.44	0.60	0.82
Warmest	Winter	454	0.63	0.52	0.24	0.34	0.48	0.78	1.13
	Spring	589	0.77	0.62	0.28	0.42	0.63	0.92	1.42
	Summer	488	1.57	1.56	0.33	0.58	1.10	1.98	3.28
	Fall	18	0.72	1.43	0.22	0.25	0.42	0.46	0.74

^a ACH = air changes per hour.

^b The coldest region was defined as having 7,000 or more heating degree days, the colder region as 5,500–6,999 degree days, the warmer region as 2,500–5,499 degree days, and the warmest region as fewer than 2,500 degree days.

- Few observations for summer results in colder regions. Data not available.

Source: Murray and Burmaster (1995).

Building Type	N	Mean (ACH ^a)	SD	10 th Percentile	Range (ACH)
Educational	7	1.9			0.8 to 3.0
Office (<100,000 ft ²)	8	1.5			0.3 to 4.1
Office (>100,000 ft ²)	14	1.8			0.7 to 3.6
Libraries	3	0.6			0.3 to 1.0
Multi-use	5	1.4			0.6 to 1.9
Naturally ventilated	3	0.8			0.6 to 0.9
Total (all commercial)	40	1.5	0.87	0.60 ^b	0.3 to 4.1

^a ACH = air changes per hour.

^b Calculated from data presented in Turk et al. (1987), Table IV.C.1.

N = Number of observations.

SD = Standard deviation.

Source: Turk et al. (1987).

Table 19-28. Statistics of Estimated Normalized Leakage Distribution Weighted for All Dwellings in the United States

House Code	Estimated Normalized Leakage Percentiles							Estimated	
	5 th	10 th	25 th	50 th	75 th	90 th	95 th	GM	GSD
Low income	0.30	0.39	0.62	0.98	1.5	2.2	2.7	0.92	1.9
Conventional	0.17	0.21	0.31	0.48	0.75	1.1	1.4	0.49	1.9
Whole U.S.	0.17	0.22	0.33	0.52	0.84	1.3	1.7	0.54	2.0

GM = Geometric mean.
 GSD = Geometric standard deviation.

Source: Chan et al. (2005).

Table 19-29. Particle Deposition During Normal Activities

Particle Size Range	Particle Removal Rate (hour ⁻¹)
1–5	0.5
5–10	1.4
10–25	2.4
>25	4.1

Source: Adapted from Thatcher and Layton (1995).

Table 19-30. Deposition Rates for Indoor Particles

Size Fraction	Deposition Rate (hour ⁻¹)
PM _{2.5}	0.39
PM ₁₀	0.65
Coarse	1.0

Source: Adapted from Wallace (1996).

Chapter 19—Building Characteristics

Table 19-31. Measured Deposition Loss Rate Coefficients (hour⁻¹)

Median Particle Diameter (µm)	Fans Off			Room Core Airspeed 5.4 cm/second			Room Core Airspeed 14.2 cm/s			Room Core Airspeed 19.1 cm/second		
	Bare room surfaces	Carpeted room	Fully furnished	Bare room surfaces	Carpeted room	Fully furnished	Bare room surfaces	Carpeted room	Fully furnished	Bare room surfaces	Carpeted room	Fully furnished
0.55	1.10	0.12	0.20	0.10	0.13	0.23	0.09	0.18	0.23	0.14	0.16	0.27
0.65	0.10	0.12	0.20	0.10	0.13	0.23	0.10	0.19	0.24	0.14	0.17	0.28
0.81	0.10	0.11	0.19	0.10	0.15	0.24	0.11	0.19	0.27	0.15	0.19	0.30
1.00	0.13	0.12	0.21	0.12	0.20	0.28	0.15	0.23	0.33	0.20	0.25	0.38
1.24	0.20	0.18	0.29	0.18	0.28	0.38	0.25	0.34	0.47	0.33	0.38	0.53
1.54	0.32	0.28	0.42	0.27	0.39	0.54	0.39	0.51	0.67	0.51	0.59	0.77
1.91	0.49	0.44	0.61	0.42	0.58	0.75	0.61	0.78	0.93	0.80	0.89	1.11
2.37	0.78	0.70	0.93	0.64	0.84	1.07	0.92	1.17	1.32	1.27	1.45	1.60
2.94	1.24	1.02	1.30	0.92	1.17	1.46	1.45	1.78	1.93	2.12	2.27	2.89
3.65	1.81	1.37	1.93	1.28	1.58	1.93	2.54	2.64	3.39	3.28	3.13	3.88
4.53	2.83	2.13	2.64	1.95	2.41	2.95	3.79	4.11	4.71	4.55	4.60	5.46
5.62	4.41	2.92	3.43	3.01	3.17	3.51	4.88	5.19	5.73	6.65	5.79	6.59
6.98	5.33	3.97	4.12	4.29	4.06	4.47	6.48	6.73	7.78	10.6	8.33	8.89
8.66	6.79	4.92	5.45	6.72	5.55	5.77	8.84	8.83	10.5	12.6	11.6	11.6

Source: Thatcher et al. (2002).

Table 19-32. Total Dust Loading for Carpeted Areas

Household	Total Dust Load (g/m ²)	Fine Dust (<150 µm) Load (g/m ²)
1	10.8	6.6
2	4.2	3.0
3	0.3	0.1
4	2.2; 0.8	1.2; 0.3
5	1.4; 4.3	1.0; 1.1
6	0.8	0.3
7	6.6	4.7
8	33.7	23.3
9	812.7	168.9

Source: Adapted from Roberts et al. (1991).

Chapter 19—Building Characteristics

Particle Size Range (µm)	Particle Deposition Rate (hour ⁻¹)	Particle Resuspension Rate (hour ⁻¹)
0.3–0.5	(not measured)	9.9×10^{-7}
0.6–1	(not measured)	4.4×10^{-7}
1–5	0.5	1.8×10^{-5}
5–10	1.4	8.3×10^{-5}
10–25	2.4	3.8×10^{-4}
>25	4.1	3.4×10^{-5}

Source: Adapted from Thatcher and Layton (1995).

Location in Test House	Dust Loading (g/m ²)
Tracked area of downstairs carpet	2.20
Untracked area of downstairs carpet	0.58
Tracked area of linoleum	0.08
Untracked area of linoleum	0.06
Tracked area of upstairs carpet	1.08
Untracked area of upstairs carpet	0.60
Front doormat	43.34

Source: Adapted from Thatcher and Layton (1995).

Chapter 19—Building Characteristics

Table 19-35. Simplified Source Descriptions for Airborne Contaminants		
Description	Components	Dimensions
Direct emission rate		
Combustion emission rate	$E_f H_f M_f$ E_f = emission factor H_f = fuel content M_f = fuel consumption rate	g hour^{-1} g J^{-1} J mol^{-1} mol hour^{-1}
Volume emission rate	$Q_p C_p \varepsilon$ Q_p = volume delivery rate C_p = concentration in carrier ε = transfer efficiency	g hour^{-1} $\text{m}^3 \text{hour}^{-1}$ g m^{-3} g g^{-1}
Mass emission rate	$M_p w_e \varepsilon$ M_p = mass delivery rate w_e = weight fraction ε = transfer efficiency	g hour^{-1} g hour^{-1} g g^{-1} g g^{-1}
Diffusion limited emission rate	$(D_f \delta^{-1})(C_s - C_i)A_i$ D_f = diffusivity δ^{-1} = boundary layer thickness C_s = vapor pressure of surface C_i = room concentration A_i = area	g hour^{-1} $\text{m}^2 \text{hour}^{-1}$ meters g m^{-3} g m^{-3} m^2
Exponential emission rate	$A_i E_o e^{-k t}$ A_i = area E_o = initial unit emission rate k = emission decay factor t = time	g hour^{-1} m^2 $\text{g hour}^{-1} \text{m}^{-2}$ hour^{-1} hours
Transport		
Infiltration	$Q_{ji} C_j$	g hour^{-1}
Interzonal	Q_{ji} = air flow from zone j	$\text{m}^3 \text{hour}^{-1}$
Soil gas	C_j = air concentration in zone j	g m^{-3}

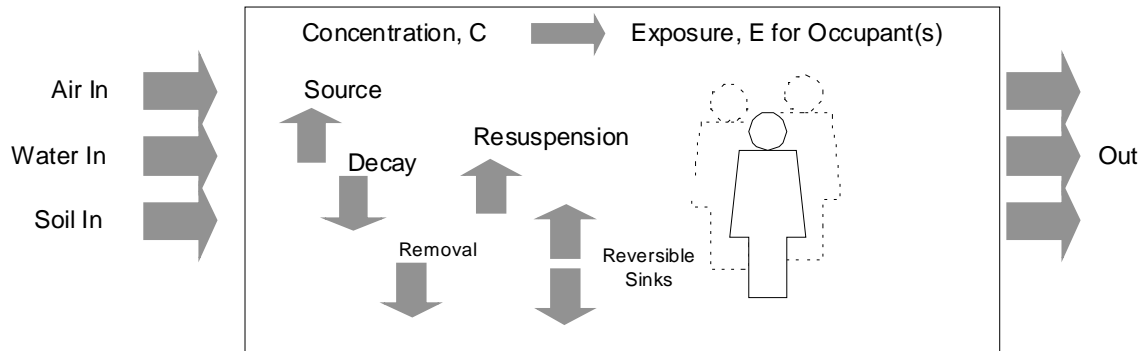


Figure 19-1. Elements of Residential Exposure.

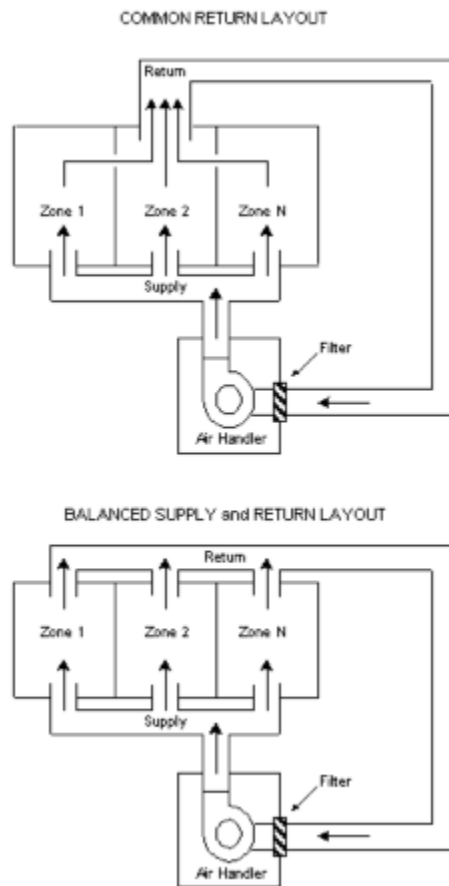


Figure 19-2. Configuration for Residential Forced-Air Systems.

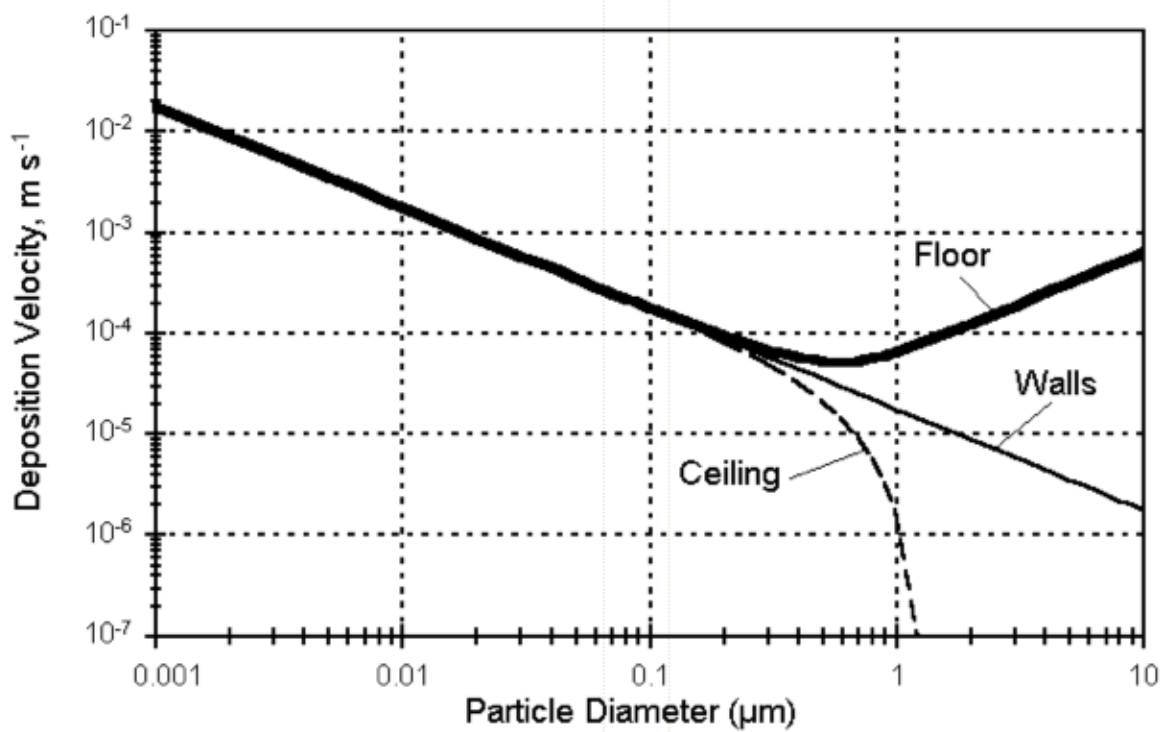


Figure 19-3. Idealized Patterns of Particle Deposition Indoors.

Source: Adapted from Nazaroff and Cass (1989b).

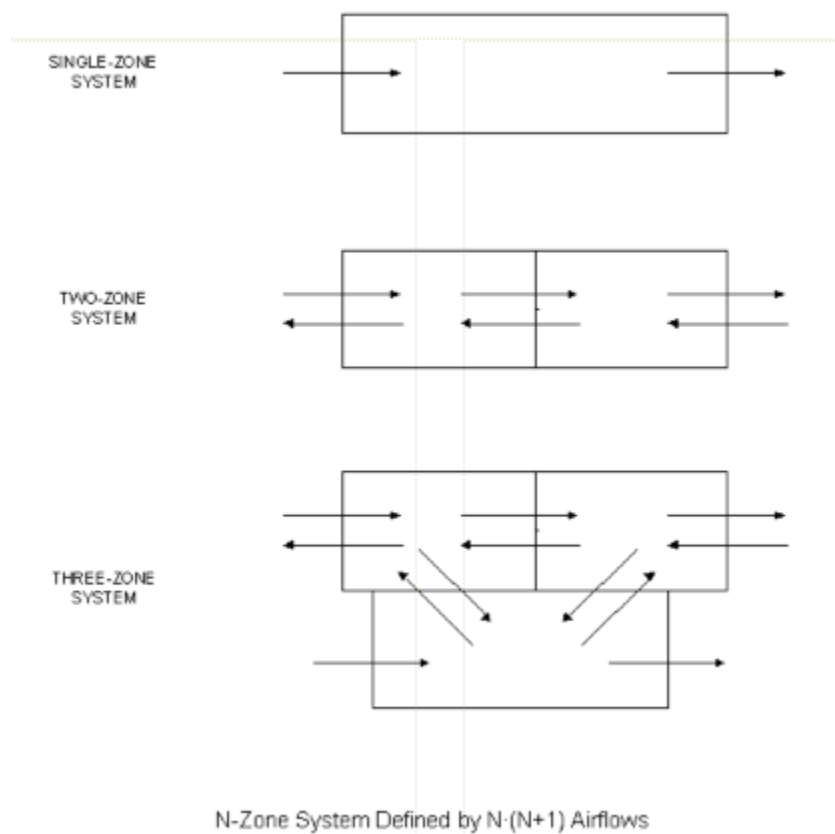


Figure 19-4. Air Flows for Multiple-Zone Systems.